

TECHNICAL DATA


operating temperature:	- 20°C up to max. + 150°C, pressure dependent - 20°C up to max. + 60°C for gas
working pressure:	max. PN 100 bar, MOP 5 for gas compressed air max. 20 bar
Vacuum tightness:	800 mbar
connecting thread:	according to DIN EN 10226-1
body material :	stainless steel 1.4408
Screw-in bush:	stainless steel 1.4408
ball :	stainless steel 1.4401
ball seal :	PTFE
stem :	stainless steel 1.4401
stem seals :	3x PTFE+FKM O-Ring
lever :	stainless steel, plastic coated black



Approval:

<input type="checkbox"/> TA-Luft acc.to DIN EN ISO 15848-1
<input type="checkbox"/> DIN DVGW GAS acc.to DIN EN 331
<input type="checkbox"/> Antistatic

Connecting thread female/female

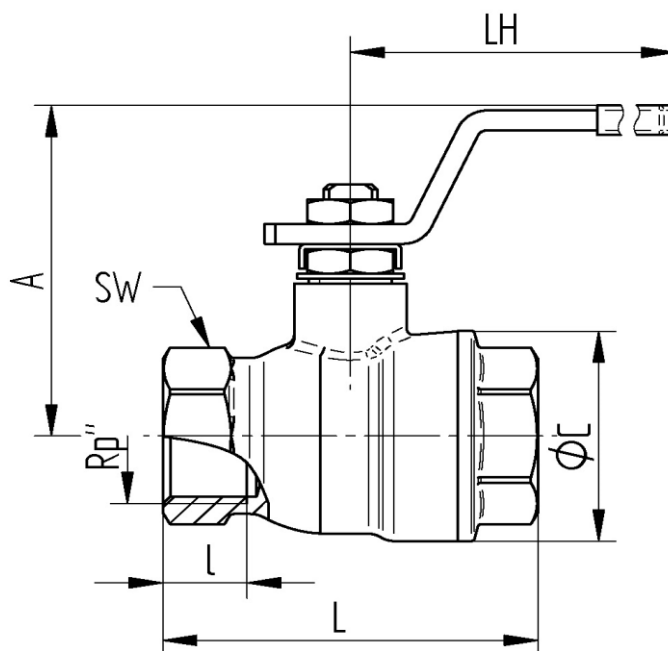

Item No.	Rp	øDN	L mm	l mm	A mm	LH mm	øC mm	SW mm	PN (bar)	weight (Kg)
900-02	1/4"	8	55	11,4	52	110	29	21,5	5/100	0,22
900-03	3/8"	10	55	11,4	52	110	29	21,5	5/100	0,21
900-04	1/2"	15	65	15	55	110	34	26,5	5/100	0,28
900-05	3/4"	20	70	16,3	66	140	42,5	31,5	5/64	0,47
900-06	1"	25	85	19,1	70	140	50,5	40,5	5/64	0,71
900-07	1 1/4"	32	95	21,4	85	180	63	49,5	5/40	1,18
900-08	1 1/2"	40	105	21,4	91	180	75,5	54,5	5/40	1,74
900-09	2"	50	125	25,7	105	230	91	69,5	5/40	2,93