


Brass

TECHNICAL DATA

temperature range :	-20°C up to max. +150°C, pressure-dependent
pressure range :	max. PN 40 bar
compressed air:	max. 10 bar
connecting thread:	according to DIN EN ISO 228-1
body material:	Brass CW617N nickel plated
threaded ends:	Brass CW617N nickel plated
ball:	Brass CW614N chromium plated
ball seals:	PTFE
stem:	Brass CW614N nickel plated
stem seals:	PTFE , O-Ring FKM with packing gland
handle:	aluminium, coated black



Connecting thread female / female

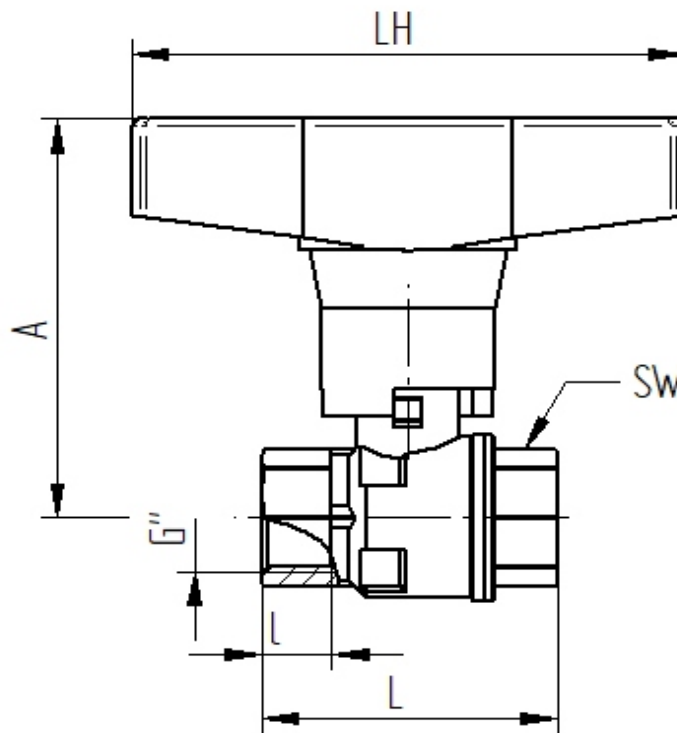

Art. Nr.	G"	DN	L mm	l mm	A mm	LH mm	SW mm	PN bar	weight (g)
680-03	3/8"	10	42,5	10	63	80	20	40	174
680-04	1/2"	15	50	12	66	80	26	40	231
680-05	3/4"	20	55	12	70	80	32	40	315
680-06	1"	25	68	15	77	80	40	32	505
680-07	1 1/4"	32	76	14	87	120	48	25	710
680-08	1 1/2"	40	84	15	92	120	54	20	950
680-09	2"	50	106	19	106	120	68	20	1565