



## Brass

### TECHNICAL DATA

|                    |                                                              |
|--------------------|--------------------------------------------------------------|
| temperature range: | - 20°C up to max. + 150°C, pressure-dependent                |
| pressure range :   | max. PN 40 bar,<br>depending on nominal size and temperature |
| connecting thread: | according to DIN EN ISO 228-1                                |
| body material:     | Brass CW617N nickel plated                                   |
| threaded ends:     | Brass CW617N nickel plated                                   |
| ball:              | Brass CW614N chromium plated                                 |
| ball seals:        | PTFE                                                         |
| stem:              | Brass CW614N nickel plated                                   |
| stem seals:        | PTFE , O-Ring FKM with packing gland                         |
| O-Ring plug:       | PTFE                                                         |
| O-Ring draining:   | PTFE                                                         |
| handle:            | steel, red plastic coated                                    |

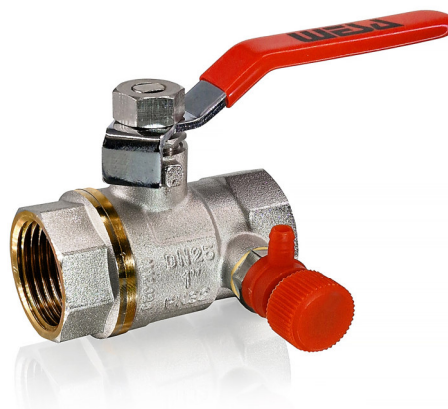

### Connecting thread female / female

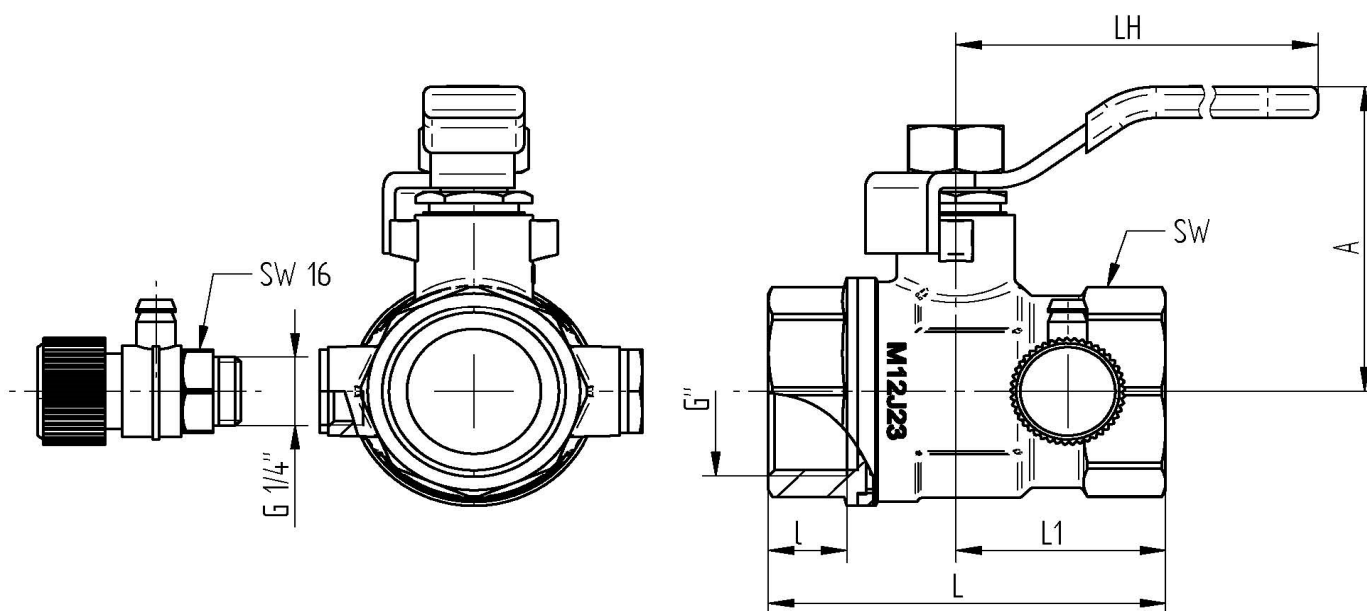

| Item No. | G      | DN | L mm | I mm | L1 mm | A mm | LH mm | SW | PN(bar) | weight (g) |
|----------|--------|----|------|------|-------|------|-------|----|---------|------------|
| 704-04   | 1/2"   | 15 | 52   | 11   | 29    | 50   | 94    | 25 | 40      | 245        |
| 704-05   | 3/4"   | 20 | 61   | 11   | 34    | 54   | 94    | 32 | 40      | 349        |
| 704-06   | 1"     | 25 | 71   | 16   | 38    | 59   | 99    | 38 | 32      | 498        |
| 704-07   | 1 1/4" | 32 | 83   | 15   | 44    | 72   | 130   | 48 | 25      | 790        |
| 704-08   | 1 1/2" | 40 | 93   | 15   | 50    | 76   | 130   | 54 | 20      | 1057       |
| 704-09   | 2"     | 50 | 105  | 16   | 55    | 93   | 154   | 68 | 16      | 1686       |