


## Brass

### TECHNICAL DATA

temperature range:	- 20°C up to max. + 150°C, pressure-dependent
pressure range :	max. PN 40 bar, depending on nominal size and temperature
connecting thread:	according to DIN EN ISO 228/1
body material:	Brass CW617N nickel plated
threaded ends:	Brass CW617N nickel plated
ball:	Brass CW614N chromium plated
ball seals:	PTFE
stem:	Brass CW614N nickel plated
stem seals:	PTFE , O-Ring FKM with packing gland
butterfly handle:	<b>7116R</b> Alu red coated <b>7116B</b> Alu blue coated



### Connecting thread female/male

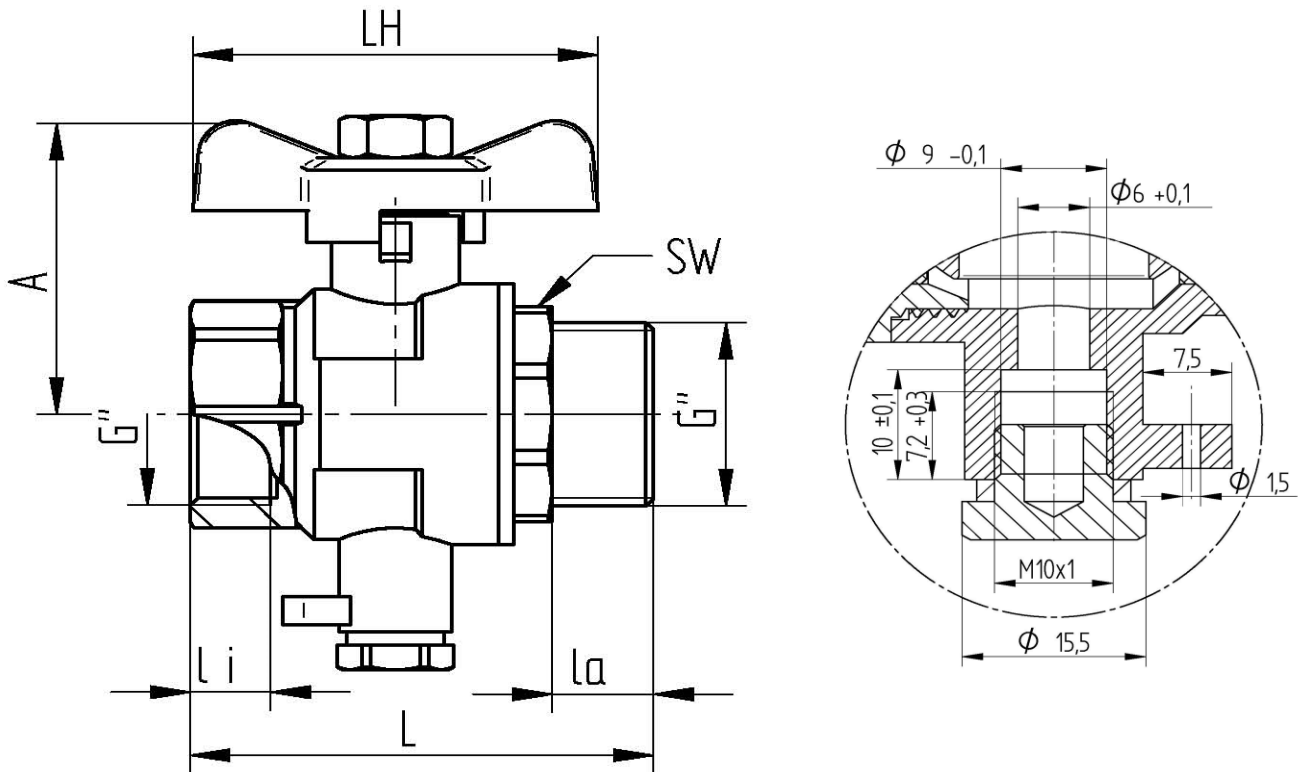

Item No.	G"	DN	L mm	li mm	la mm	A mm	LH mm	SW mm	PN bar	Weight (g)
7116-55	3/4" x 3/4"	20	61	9	13	42	56	31	40	302
7116-56	3/4" x 1"	25	66,8	9	15	42	56	31	40	320
7116-57	3/4" x 1 1/4"	32	60,5	9	17	42	56	31	40	329
7116-66	1" x 1"	40	70	11	15	53	72	38	32	442