



Brass - long thread version

TECHNICAL DATA

temperature range:	- 20°C up to max. + 150°C, pressure-dependent
pressure range :	max. PN 40 bar, depending on nominal size and temperature
connecting thread:	long thread, according to DIN EN ISO 228-1
body material:	Brass CW617N nickel plated
threaded ends:	Brass CW617N nickel plated
ball:	Brass CW617N chromium plated
ball seals:	PTFE
stem:	Brass CW617N nickel plated
stem seals:	PTFE , O-Ring FKM/FPM
packing gland:	Brass CW617N nickel plated
handle:	Aluminium butterfly handle, red painted

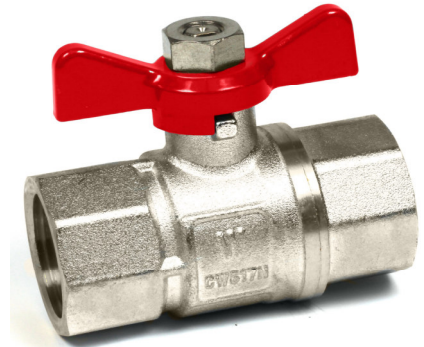

Connecting thread female/female

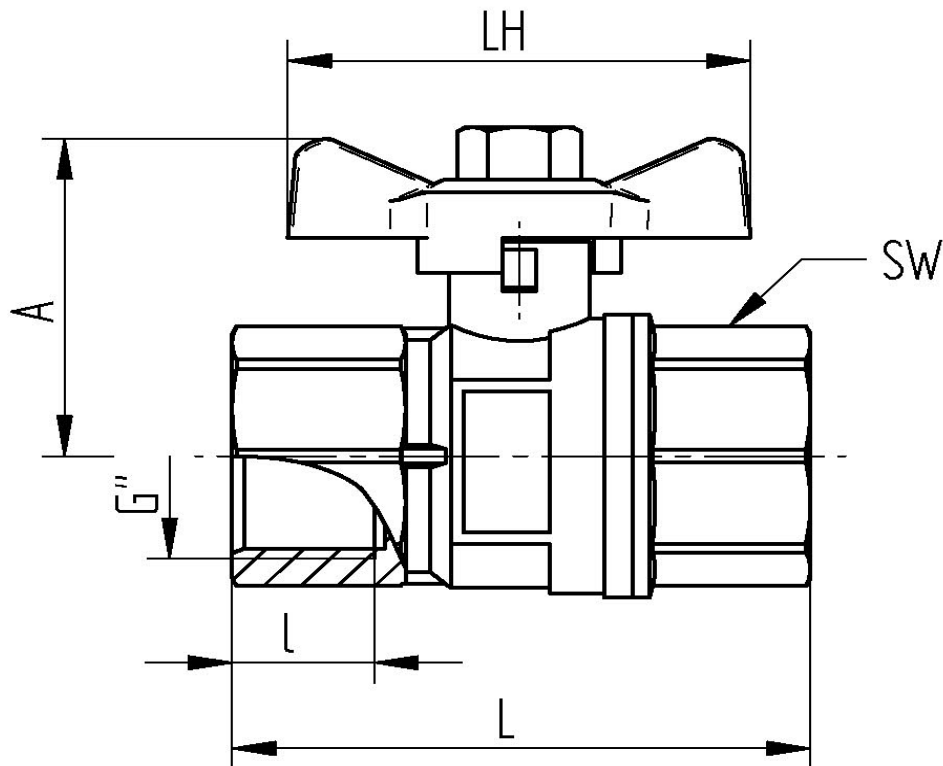

Art.Nr.	G"	DN	L mm	l mm	A mm	LH mm	SW mm	PN	Gewicht (g)
766-02	1/4"	8	50	14	40	56	20	40	114
766-03	3/8"	10	50	14	40	56	20	40	125
766-04	1/2"	15	61	18	45	56	26	40	203
766-05	3/4"	20	70	19	49	56	32	32	286
766-06	1"	25	84	24	56	72	40	32	500
766-07	1 1/4"	32	98	24	68	78	50	25	878