


## Brass

### TECHNICAL DATA

temperature range :	- 20°C up to max. + 120°C, pressure-dependent
pressure range :	max. PN 10 bar
connecting thread :	according to DIN EN ISO 228-1 reduced bore
body material :	Brass CW617N hard chromium plated
ball :	Brass CW617N hard chromium plated
ball seals :	PTFE
stem :	Brass CW617N nickel plated
stem seals :	EPDM
lever:	Aluminium alloy black



### Connecting thread female / male

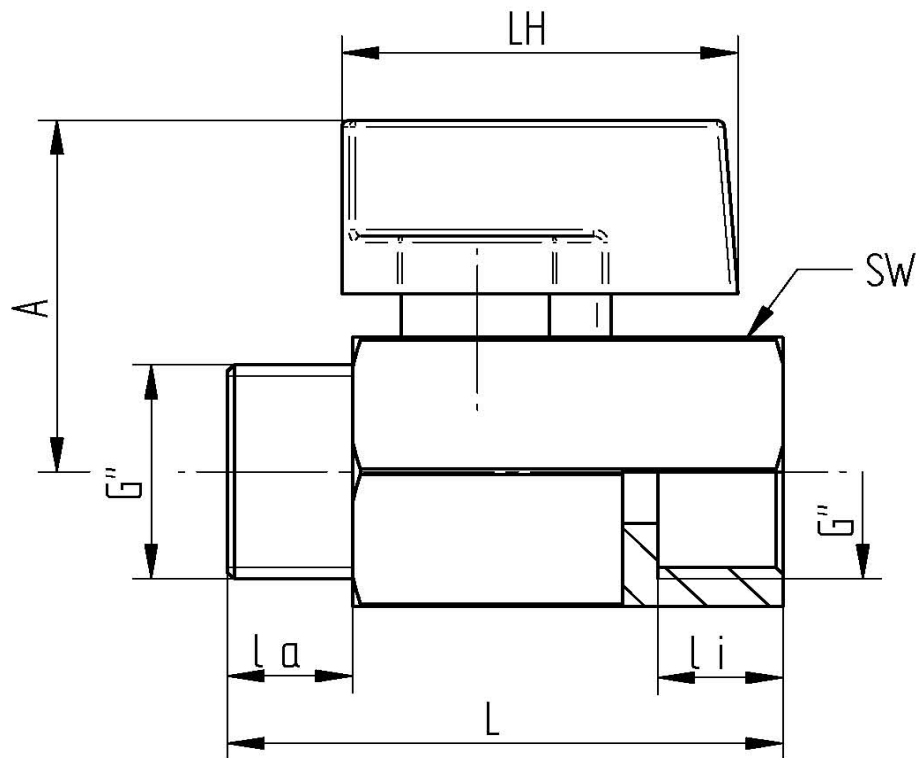

Art. Nr.	G"	øDN	L mm	li mm	la mm	A mm	LH mm	SW mm	PN (bar)	weight (Kg)
501-01	1/8"	6	40,5	10	10	26	32	20	10	0,080
501-02	1/4"	8	40,5	10	10	26	32	20	10	0,080
501-03	3/8"	8	41	9	10	26	32	20	10	0,075
501-04	1/2"	10	48,5	10,5	11	28	32	23,8	10	0,115
501-05	3/4"	12	51,5	12	13	32,5	32	30	10	0,185