


Stainless steel

TECHNICAL DATA

Construction:	2-way ball valve, full bore
Design:	2-part design
Connection end:	Long thread to DIN EN ISO 228-1
Face-to-face length:	DIN 3202 M3
Medium temperature:	-20°C to +180°C pressure-dependent
Medium nominal pressure:	Max. 63 bar temperature-dependent
Body:	Stainless steel 1.4408
Screw-in socket:	Stainless steel 1.4408
Ball:	Stainless steel 1.4408
Spindle:	Stainless steel 1.4408 blow-out proof
Ball seal:	RPTFE + 3%GF
Spindle seal:	RPTFE with stuffing box
Actuation:	Handle lever with lockable Stainless steel 1.4301, plastic sleeve blue



Connecting thread female/female

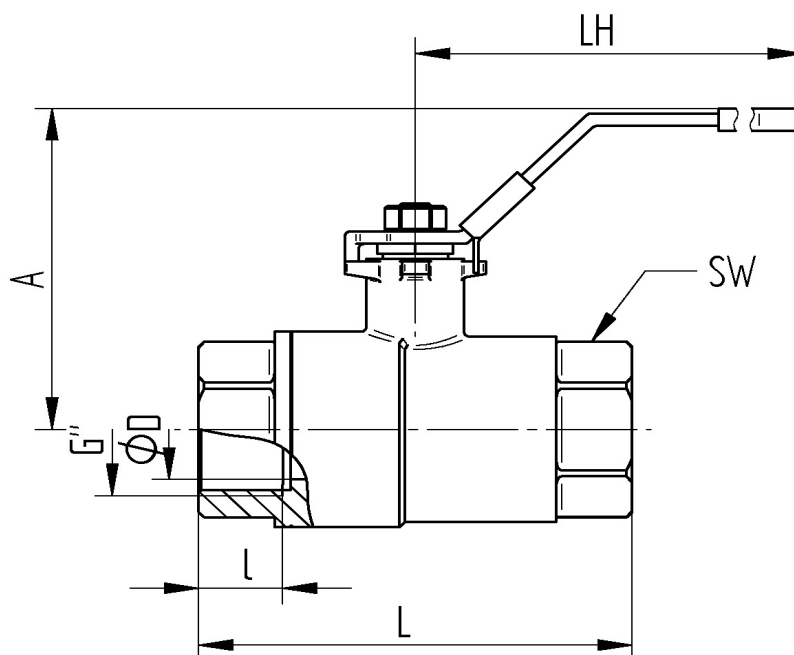

Item No.	G"	øDN	øD mm	L mm	l mm	A mm	LH mm	SW	PN bar	Weight (g)
9304-02	1/4"	8	11	50	11	45	103	22	63	225
9304-03	3/8"	10	12,7	60	11.4	45	103	22	63	225
9304-04	1/2"	15	15	75	15	49	103	26	63	312
9304-05	3/4"	20	20	80	16.3	59	127	32	63	475
9304-06	1"	25	25	90	19.1	62	127	39	63	667
9304-07	1 1/4"	32	32	110	21.4	83	154	48.5	63	1230
9304-08	1 1/2"	40	38	120	21.4	87	154	55	63	1620
9304-09	2"	50	50	140	25.7	102	192	68	63	2800
9304-10	2 1/2"	65	65	185	31	137	244	85	63	5285