


Stainless steel

TECHNICAL DATA

Construction:	2-way ball valve, full bore
Design:	2-part design
Connection end:	Long thread to DIN EN ISO 228-1
Medium temperature:	-20°C to +180°C pressure-dependent
Medium nominal pressure	Max. 63 bar temperature-dependent
Body:	Stainless steel 1.4408
Screw-in socket:	Stainless steel 1.4408
Ball:	Stainless steel 1.4408
Spindle:	Stainless steel 1.4408 blow-out proof
Ball seal:	RPTFE + 3%GF
Spindle seal:	RPTFE with stuffing box
Actuation:	Handle lever with lockable Stainless steel 1.4301, plastic sleeve blue



Connecting thread female/male

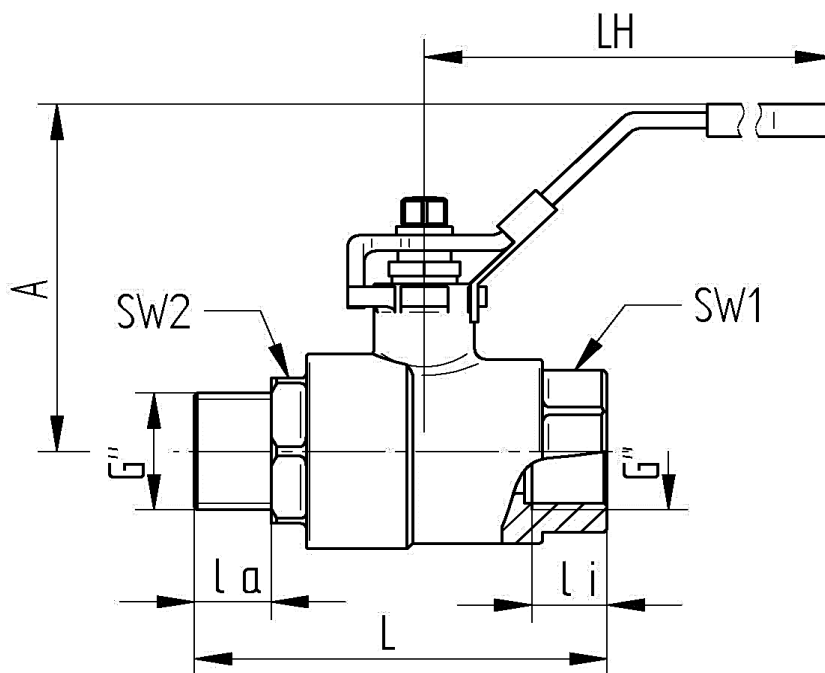

Item No.	G"	DN	Lmm	la mm	li mm	A mm	LH mm	SW 1	SW 2	PN	Weight (g)
9310-02	1/4"	8	60,5	10,5	13,5	51	104	22	18	63	230
9310-03	3/8"	10	60,5	10,5	12	51	104	22	18	63	210
9310-04	1/2"	15	78,5	11,5	14	53	104	26	23	63	290
9310-05	3/4"	20	88,5	13	17	65	126	32	28,5	63	527
9310-06	1"	25	100	17	19	77	144	40	33	63	879
9310-07	1 1/4"	32	110,5	19	22	81,5	144	48	43,5	63	1142
9310-08	1 1/2"	40	121	18,5	22	94,5	189	56	49,5	63	1332
9310-09	2"	50	141,5	24	25	102	1893	70	62	63	2490