


Stainless steel

TECHNICAL DATA

Design:	2-way ball valve, full bore
Construction:	2-part design
Connection end:	Threaded ends acc.to DIN EN ISO 228-1
Medium temperature:	-30°C to +180°C pressure-dependent
Medium pressure:	Max.40 bar temperature-dependent
Body:	Stainless steel 1.4408
Body cap:	Stainless steel 1.4408
Ball:	Stainless steel 1.4408
Stem:	Stainless steel 1.4408 Blow-out proof
Ball seal:	PTFE
Stem seal:	2-fold PTFE
Actuation:	Hand lever with locking device acc.to machinery directive Stainless steel 1.4301, blue plastic sleeve



Connecting thread female/female

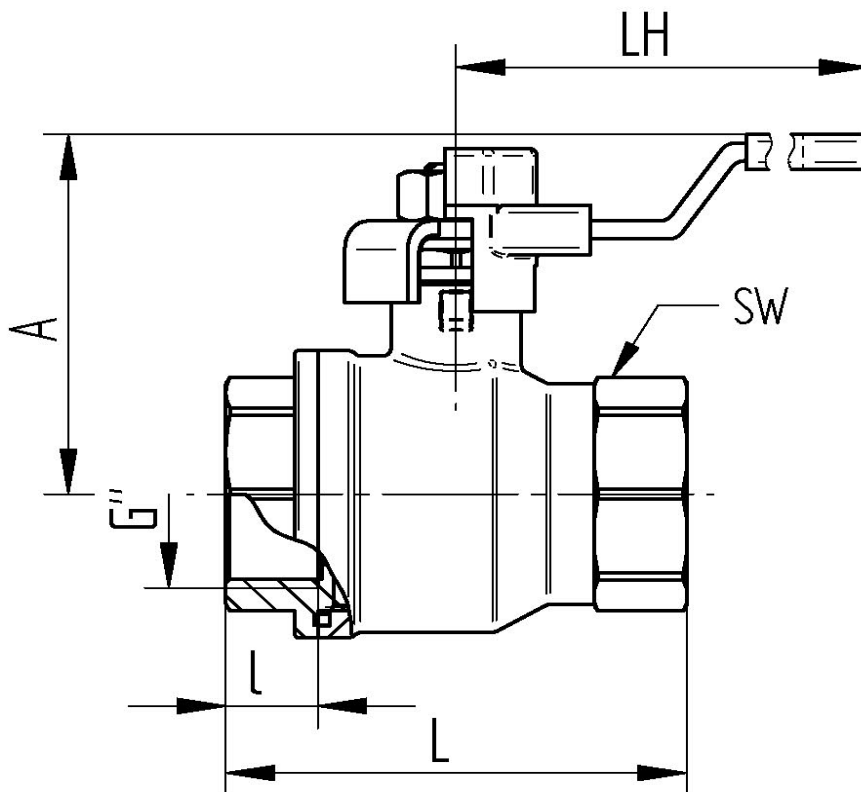

Item No.	G"	DN	Lmm	l mm	A mm	LH mm	SW mm	PN bar	weight (g)
9350-03	3/8"	10	40	9	41	94	20	40	140
9350-04	1/2"	15	50	10	46	94	25	40	215
9350-05	3/4"	20	60	12	51	94	31	40	330
9350-06	1"	25	68	13	61	116	38	40	490
9350-07	1 1/4"	32	80	16	70	133	48	25	850
9350-08	1 1/2"	40	94	18	76	133	54	25	1260
9350-09	2"	50	106	18	88	168	66	25	2120