


Stainless steel

TECHNICAL DATA

Design:	2-way ball valve, full bore
Construction:	2-part design
Connection end:	Threaded ends acc.to DIN EN ISO 228-1
Medium temperature:	-30°C to +180°C pressure-dependent
Medium pressure:	Max.40 bar temperature-dependent
Body:	Stainless steel 1.4408
Body cap:	Stainless steel 1.4408
Ball:	Stainless steel 1.4408
Stem:	Stainless steel 1.4408 Blow-out proof
Ball seal:	PTFE
Stem seal:	2-fold PTFE
Actuation:	Hand lever with locking device Stainless steel 1.4301, blue plastic sleeve



Connecting thread female/female

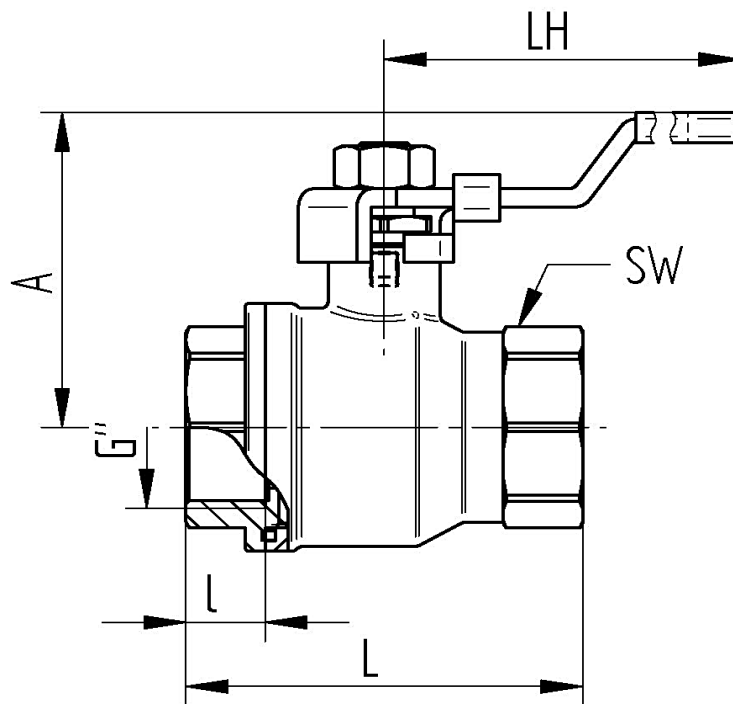

Item No.	G"	DN	Lmm	l mm	A mm	LH mm	SW mm	PN bar	weight (g)
9360-03	3/8"	10	40	9	38	94	20	40	150
9360-04	1/2"	15	50	10	43	94	25	40	207
9360-05	3/4"	20	60	12	49	94	31	40	330
9360-06	1"	25	68	13	59	115	38	40	472
9360-07	1 1/4"	32	80	16	68	130	48	25	910
9360-08	1 1/2"	40	94	18	76	130	54	25	1187
9360-09	2"	50	106	18	88	154	66	25	2101