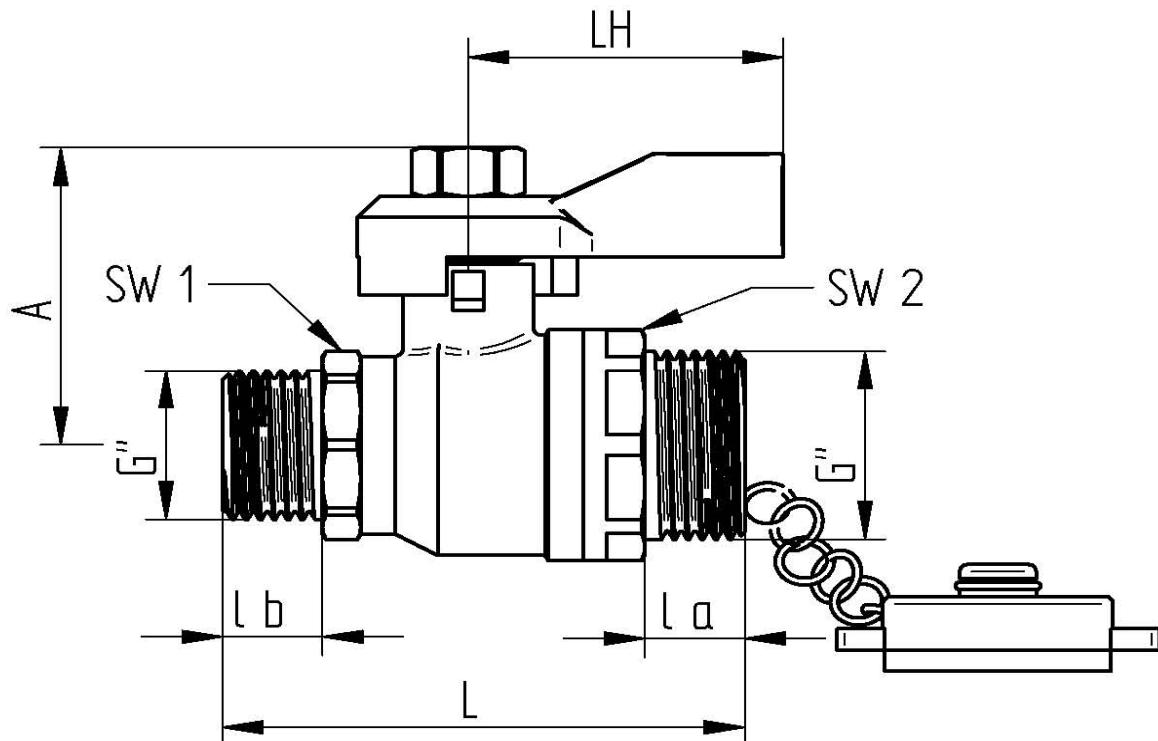


Stainless steel
TECHNICAL DATA

Construction	2-way ball valve
Design	2-piece design, full bore
Connection end:	Thread acc. to DIN EN ISO 228-1
Medium temperature:	-20°C up to +180°C pressure-dependent
Nominal pressure:	Max. 40 bar temperature-dependent
Body:	Stainless Steel 1.4408
Screw-in socket:	Stainless Steel 1.4408
Ball:	Stainless Steel 1.4408
Stem:	Stainless Steel 1.4408
Ball seat:	PTFE
Stem seal:	PTFE+Graphite, with gland package
Chain and cap:	Stainless Steel 1.4401


Connecting thread male / male


Art. Nr.	G"	L mm	l a mm	l b mm	A mm	LH mm	SW1	SW2	PN bar	weight (g)
1542-45	1/2" / 3/4"	68	13	13	42	32	25	31	40	290

11/2025