


Stainless steel

TECHNICAL DATA

Construction:	2-way ball valve
Design:	3-part design, full bore up to 2"
Connection end:	Thread acc. to DIN EN 10226-1
Medium temperature:	-25°C up to +180°C pressure-dependent
Nominal pressure:	Max. 63 bar temperature-dependent
Body:	Stainless steel 1.4408
Screw-in socket:	Stainless steel 1.4408
Ball:	Stainless steel 1.4401
Ball seal:	RPTFE fibre glass
Stem:	Stainless steel 1.4401
Stem seal:	2-fold PTFE with stuffing box
Handle lever:	Stainless steel 1.4301, blue plastic sleeve
	Locking device



Connecting thread female/female

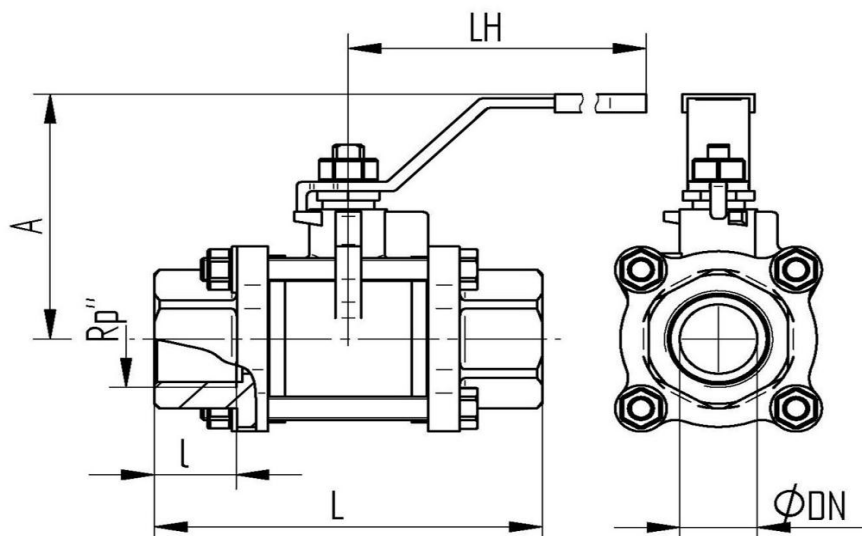

Item No.	Rp"	øDN	L mm	l mm	A mm	LH mm	PN(bar)	Weight (g)
9321-02	1/4"	11	50	11	48	103	63	400
9321-03	3/8"	12	50	11	48	103	63	420
9321-04	1/2"	15	61	15	50	103	63	450
9321-05	3/4"	20	70	16	60	127	63	730
9321-06	1"	25	80	19	64	127	63	1040
9321-07	1 1/4"	32	93	20	79	154	63	1650
9321-08	1 1/2"	38	102	22	85	154	63	2430
9321-09	2"	50	124	25	87	192	63	3520
9321-10	2 1/2"	65	156	30	117	244	63	7140
9321-11	3"	76	179	35	125	244	63	11850
9321-12	4"	100	218	39	173	330	63	20050