

Stainless steel

Technical Data


Body material :	stainless steel 1.4408
Screw-in-sleeve:	stainless steel 1.4408
Connection thread :	according to DIN EN 10226-1
Ball :	Stainless steel 1.4401
Ball seals :	RPTFE 3%
Spindle :	stainless steel 1.4401, Blow-out proof
Spindle seals :	PTFE / FKM
Actuator connection :	according to DIN EN ISO 5211
Operating temperature :	- 20°C to max. + 150°C, pressure dependent
Working pressure :	max. PN 140 bar temperature dependent Compressed air max. 20 bar



Approval :	☐ EAC nach TR CU 010/2011
Optional:	☐ ATEX nach 2014/34/EU



Thread female / female

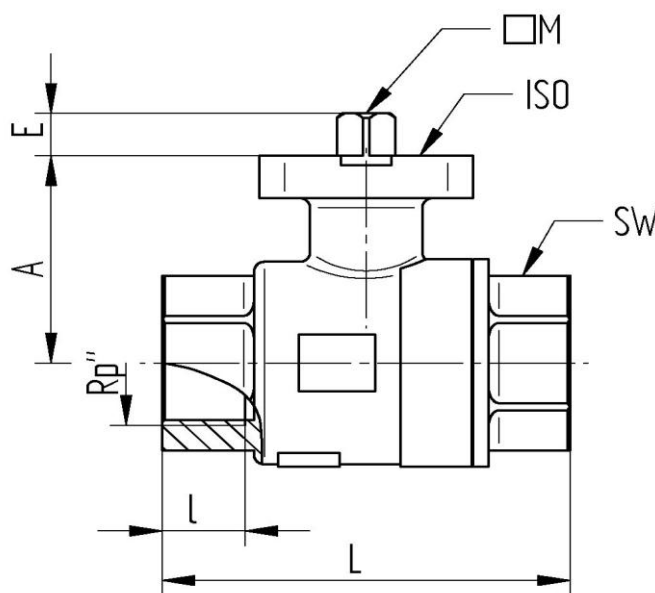

Item No.	Rp"	DN	A mm	L mm	I mm	SW mm	øISO	M mm	E mm	PN bar	Weight (kg)
9768-02	1/4"	10	42	65	13	22	F 03/04	9	7	140	0,43
9768-03	3/8"	12	42	65	11	22	F 03/04	9	7	140	0,41
9768-04	1/2"	15	42	75	16	26	F 03/04	9	7	140	0,44
9768-05	3/4"	20	45	80	18	33	F 03/04	9	9	140	0,55
9768-06	1"	25	52	90	18	41	F 04/05	11	12	140	0,96
9768-07	1 1/4"	32	58	110	21	50	F 04/05	11	12	100	1,40
9768-08	1 1/2"	40	68	120	22	58	F 05/07	14	16	100	2,24
9768-09	2"	50	77	140	25	70	F 05/07	14	16	100	3,60
9768-10	2 1/2"	65	99	185	38	87	F 07/10	17	19	64	7,60
9768-11	3"	80	111	205	38	104	F 07/10	17	19	64	11,30