


Stainless steel

Technical data

Construction:	2-way gate valve
Design:	2-part design
Connection end:	acc. to DIN EN 10226-1
Medium temperature:	-25°C up to +160°C pressure-dependent
Nominal pressure:	Max. 16 bar temperature-dependent
Body:	Stainless steel 1.4408
Screw-in socket:	Stainless steel 1.4408
Gate:	Stainless steel 1.4408
Stem:	Stainless steel 1.4401
Stem seal:	PTFE with stuffing box
Hanswheel:	Steel sheet red coated



Connecting thread female/female

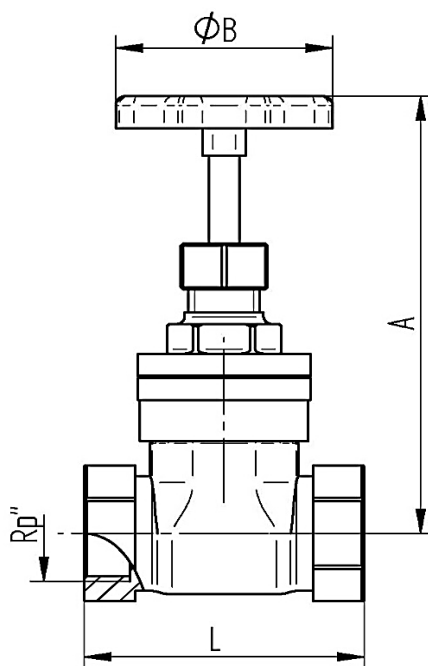

Item No.	Rp"	DN	L mm	A mm	ϕB mm	PN bar	Weight (g)
9105-04	1/2"	15	53	86	63	16	400
9105-05	3/4"	20	57	96	72	16	520
9105-06	1"	25	64	104	77	16	690
9105-07	1 1/4"	32	73	126	97	16	1070
9105-08	1 1/2"	40	76	138	97	16	1360
9105-09	2"	50	88	163	107	16	2080
9105-10	2 1/2"	65	105	198	127	16	3650
9105-11	3"	80	116	220	127	16	4710