

## bronze RG 5


### TECHNICAL DATA

|                     |  |
|---------------------|--|
| temperature range : | -10°C up to + 120°C, druckabhängig (PTFE ) |
|                     | -10°C up to +80°C (Fiber )                 |
| pressure range :    | max. PN 16 bar                             |
| body material :     | Red brass - UNI 7013                       |
| connecting thread : | according to DIN ISO 228/1                 |
| filter:             | stainless steel 1.4301                     |
| cap seal:           | PTFE (3/8"-2")                             |
|                     | Fiber (2 1/2"-4")                          |
| Filter mesch:       | ø 0,50 mm                                  |



For horizontal and vertical instalation

### Connecting thread female/female

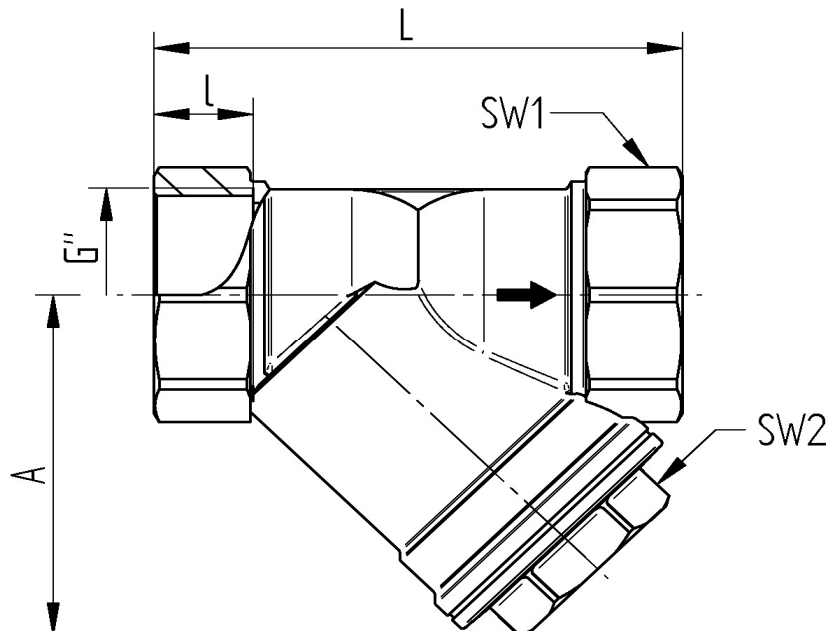

| Art. Nr. | G"     | DN  | L mm | l mm | A mm | SW1 mm | SW2 mm | PN bar | Gewicht (g) |
|----------|--------|-----|------|------|------|--------|--------|--------|-------------|
| 2240-03  | 3/8"   | 10  | 55   | 10   | 40   | 22     | 20     | 20     | 150         |
| 2240-04  | 1/2"   | 15  | 58   | 14   | 41   | 26     | 20     | 20     | 183         |
| 2240-05  | 3/4"   | 20  | 70   | 17   | 51   | 32     | 26     | 20     | 287         |
| 2240-06  | 1"     | 25  | 88   | 19   | 60   | 39     | 26     | 20     | 411         |
| 2240-07  | 1 1/4" | 32  | 96   | 22   | 70   | 48     | 35     | 20     | 669         |
| 2240-08  | 1 1/2" | 40  | 107  | 19   | 76   | 57     | 35     | 20     | 979         |
| 2240-09  | 2"     | 50  | 126  | 25   | 98   | 67     | 45     | 20     | 1472        |
| 2240-10  | 2 1/2" | 65  | 145  | 23   | 100  | 86     | 48     | 16     | 2170        |
| 2240-11  | 3"     | 80  | 165  | 27   | 118  | 100    | 55     | 16     | 3190        |
| 2240-12  | 4"     | 100 | 215  | 28   | 170  | 130    | 100    | 16     | 6830        |