


Stainless steel

TECHNICAL DATA

| | |
|-----------------------|---|
| temperature range : | -20°C up to max. +180°C, pressure dependent |
| pressure range : | max. PN 40 bar |
| connecting thread : | acc. to DIN ISO 228/1 |
| body material : | stainless steel 1.4408 |
| cap: | stainless steel 1.4408 |
| Cap seal: | PTFE |
| strainer : | stainless steel 1.4401 Meshes \varnothing 1,00 |
| test und inspection : | API 598 |



Connecting thread female/female

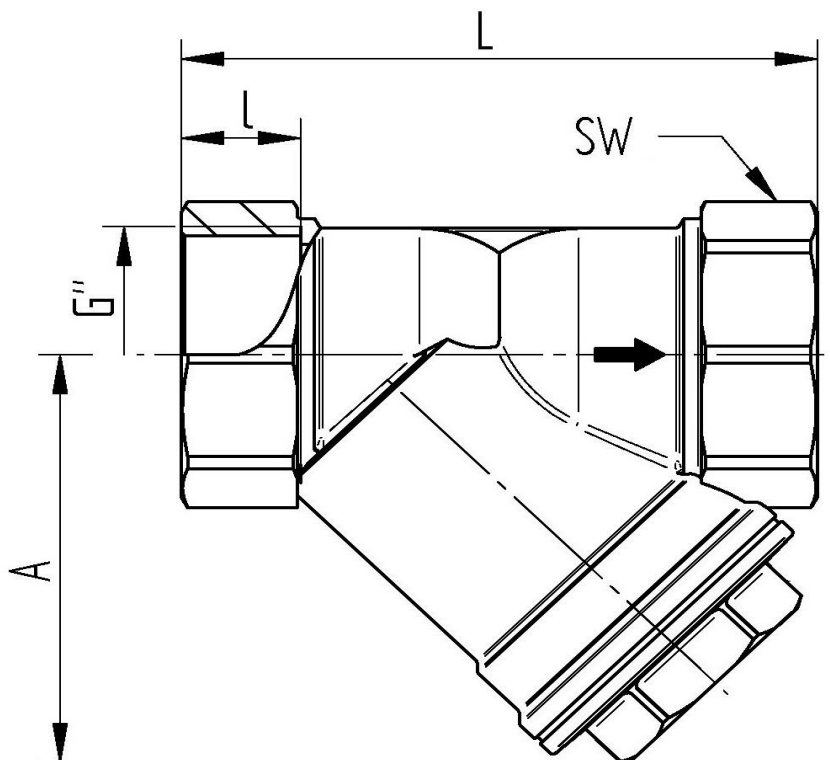

| Art. Nr. | G | \varnothing DN | L mm | l mm | A mm | SW mm | weight (g) |
|----------|--------|------------------|------|------|------|-------|------------|
| 9160-02 | 1/4" | 8 | 65 | 11 | 42 | 23,5 | 233 |
| 9160-03 | 3/8" | 10 | 65 | 11 | 42 | 23,5 | 224 |
| 9160-04 | 1/2" | 15 | 65 | 12 | 42 | 26 | 217 |
| 9160-05 | 3/4" | 20 | 80 | 15 | 51 | 32 | 340 |
| 9160-06 | 1" | 25 | 90 | 15 | 65 | 41 | 630 |
| 9160-07 | 1 1/4" | 32 | 105 | 18 | 66 | 49 | 800 |
| 9160-08 | 1 1/2" | 40 | 120 | 21,5 | 75 | 56 | 1126 |
| 9160-09 | 2" | 50 | 140 | 22,5 | 86 | 69 | 1950 |