


Stainless steel

Technical data

Construction:	1-way Y-Strainer
Design:	2-part design
Installation position:	Horizontal vertical
Connection end:	Thread acc.to DIN EN 10226-1
Medium temperature:	-25°C up to +180°C [PTFE] pressure-dependent
Nominal pressure:	Max. 40 bar temperature-dependent
Body:	Stainless steel 1.4408
Screw-in part:	Stainless steel 1.4408
Cap:	Stainless steel 1.4408
Cap sealing:	PTFE
Filter:	Stainless steel 1.4301
Filter mesh:	Ø 1,0 mm



Innengewinde

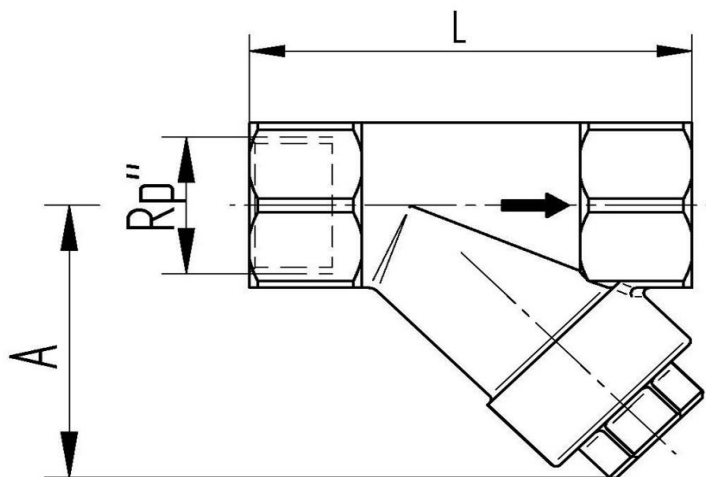

Item No.	Rp"	DN	L mm	A mm	PN (bar)	Weight (g)
9165-04	1/2"	15	64	45	40	210
9165-05	3/4"	20	80	52	40	340
9165-06	1"	25	90	68	40	590
9165-07	1 1/4"	32	106	70	40	800
9165-08	1 1/2"	40	119	80	40	1060
9165-09	2"	50	140	98	40	1610
9165-10	2 1/2"	65	167	117	40	2990
9165-11	3"	80	198	137	40	4740
9165-12	4"	100	238	163	40	7880

09-2025