


Stainless steel

TECHNICAL DATA

Construction:	1-way check valve
Design:	2-part design
Installation position:	Horizontal vertical
Connection end:	Thread acc.to DIN EN 10226-1
Medium temperature:	-25°C up to +180°C [PTFE] pressure-dependent
Nominal pressure:	Max. 40 bar temperature-dependent
Body:	Stainless steel 1.4408
Cap:	Stainless steel 1.4408
Cap sealing:	PTFE
Valve sealing:	PTFE



Connecting thread female/female

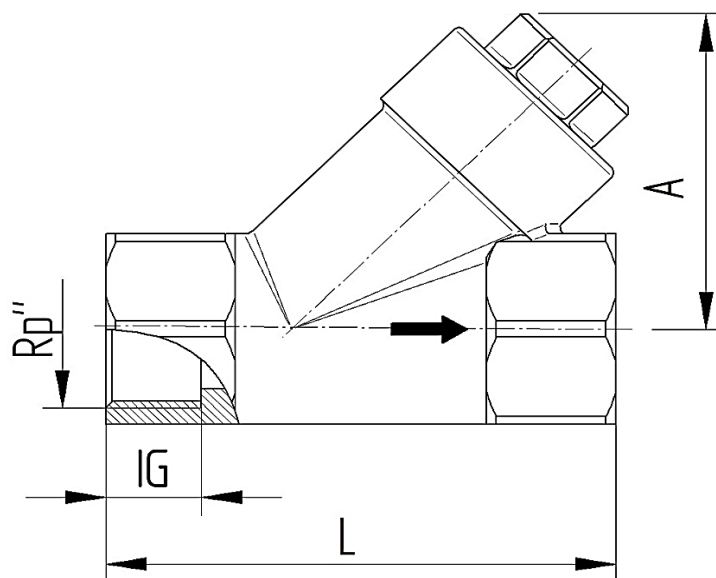

Item No.	Rp"	d	IG	L	A	PN bar	Weight (g)
9185-04	1/2"	15	13	64	45	40	220
9185-05	3/4"	20	14	79	52	40	570
9185-06	1"	25	16	90	65	40	610
9185-07	1 1/4"	30	20	106	70	40	890
9185-08	1 1/2"	38	20	119	80	40	1150
9185-09	2"	47	23	140	95	40	1750
9185-10	2 1/2"	61	24	167	117	40	3240
9185-11	3"	75	27	198	137	40	5150
9185-12	4"	94	33	238	163	40	8540