


Hot pressed brass


TECHNICAL DATA

Body:	Brass CW617N low lead
Valve disc:	Brass CW617N low lead
Pin:	Brass CW617N low lead
Spring:	Stainless steel 1.4301
Disc sealing:	EPDM
Medium temperature:	0°C up to +150°C pressure dependent
Pressure rating:	Max. 16 bar pressure dependent
Opening pressure:	0,03 bar - 0,05 bar
Installation:	horizontal vertical
Connection:	2 x Press fit system [DN15-DN50] Viega: 18 mm bis 54 mm Geberit [Mannesmann]: 18 mm bis 35 mm

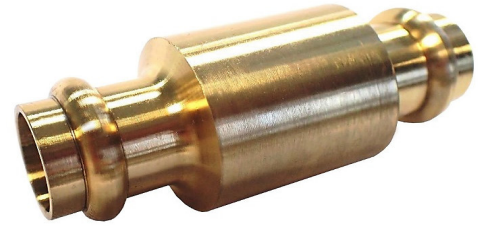

Press contour size	15x15	18x18	22x22	28x28	35x35	42x42	54x54
VIEGA	✓	✓	✓	✓	✓	✓	✓
MANNESMANN	✓	✓	✓	✓	✓	-	-

press-fit system

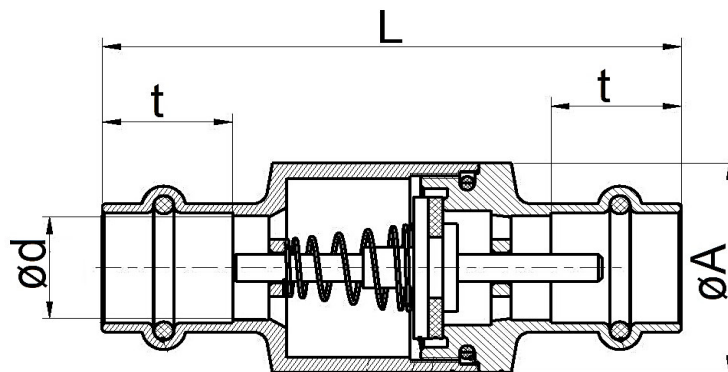

Art. Nr.	G"	DN	ød	øA mm	L mm	t mm	PN(bar)
1423-04	1/2"	15	15	31	80	18	16
1423-05	3/4"	20	20	38,2	81,2	23	16
1423-06	1"	25	25	45	86	23,5	16
1423-07	1 1/4"	32	32	58	94	26	16
1423-08	1 1/2"	40	40	66,5	119	36	16
1423-09	2"	50	50	78,5	135	45	16