

Brass


TECHNICAL DATA

Operating temp. liquids :	- 15°C to max. + 110°C, depending on pressure
Operating temperature gas :	- 20°C to max. + 60°C, depending on pressure
Operating pressure gas :	MOP 5 / PN5
Operating pressure liquids :	Compressed air max. 20 bar
Connection thread :	according to DIN EN 10226-1 long thread
Housing material :	Brass CW617N
Ball :	Brass CW617N chrome-plated
Ball seals :	PTFE
Stem :	Brass CW617N blow-out proof
Stem seals :	PTFE / HNBR / EPDM
Hand lever :	Die-cast aluminum, yellow coated

Approval: DIN-DVGW-gas, EN 331



Connecting thread female / male

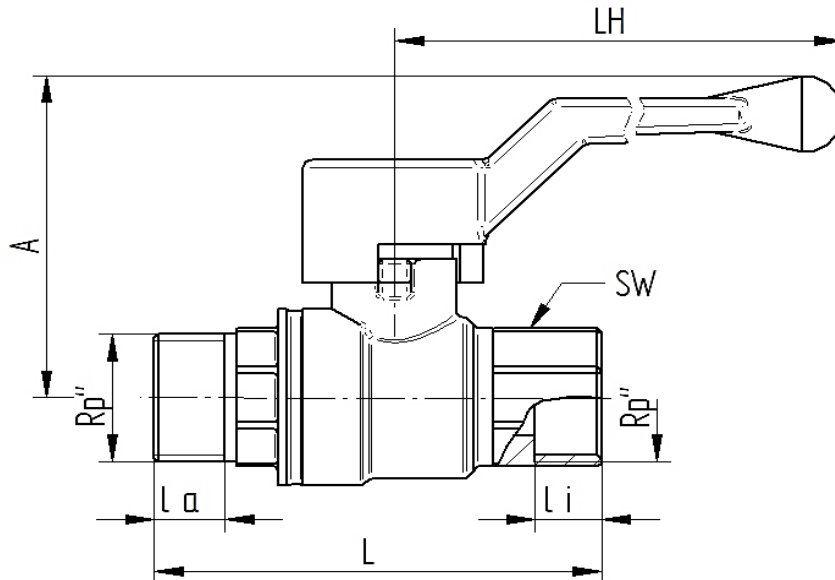

Art.Nr.	Rp"	øD	A mm	LH mm	L mm	la mm	li mm	SW mm	PN bar	Gewicht (g)
661-03	3/8"	10	42	85	54	12	12	21	5	134
661-04	1/2"	15	46	85	67	17	16	26	5	194
661-05	3/4"	20	54	105	78	19	16	31	5	329
661-06	1"	25	58	105	89	22	20	38	5	473
661-07	1 1/4"	32	70	130	103	24	21	47	5	817
661-08	1 1/2"	40	76	130	113	24	21	54	5	1151
661-09	2"	50	93	165	134,5	29	26	66	5	2243