


Brass

TECHNICAL DATA:

Operating temperature gas :	- 20°C up to max. + 60°C, druckabhängig
	IN CASE OF FIRE up to 650° in duration of max. 1 hour
Operating pressure gas :	MOP 5 / PN5
Operating pressure other media :	max. PN 40 bar
Connection thread :	Long thread acc.to DIN EN 10226-1
Housing material :	CW 617 N, nickel plated
Ball :	CW 617 N, chrome plated
Ball seals :	PTFE
Stem :	Brass CW617N blow-out proofed
Stem seals :	2-fold NBR O-Ring
Hand lever:	Steel handle with yellow plastic sleeve
Approval :	DIN DVGW GAS approval acc. to DIN EN 331



Connecting thread female/female

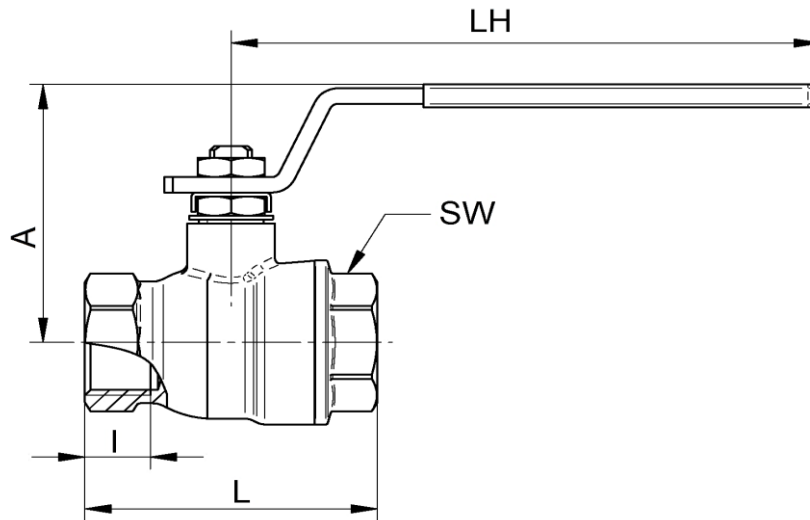

Art.Nr.	Rp"	DN	A mm	LH mm	I mm	L mm	SW mm	PN bar	weight (kg)	CVS value [m³/h]
660-04HTB	1/2"	15	50	91	17	61	25	5	0,21	15,8
660-05HTB	3/4"	20	51	91	19	69	31	5	0,30	29,0
660-06HTB	1"	25	67	120	21	80	38	5	0,53	50,0
660-07HTB	1 1/4"	32	71	120	22	93	48	5	0,77	82,0
660-08HTB	1 1/2"	40	78	120	23	103	54	5	1,02	184,0
660-09HTB	2"	50	94	145	27	125	66	5	1,79	340,0