

TECHNICAL DATA

operating temperature:	- 20°C up to max. + 150°C, pressure dependent - 20°C up to max. + 60°C for gas
working pressure:	max. PN 100 bar, MOP16 for gas compressed air max. 20 bar
Vakuum tightness:	800 mbar
connecting thread:	according to DIN 2999
body material :	stainless steel 1.4408
Screw-in bush:	stainless steel 1.4408
ball :	stainless steel 1.4401
ball seal :	PTFE
stem :	stainless steel 1.4401
stem seals :	3x PTFE+FKM O-Ring
lever :	stainless steel, plastic coated yellow

Approval:


- ☐ TA-Luft acc.to DIN EN ISO 15848-1
- ☐ DIN DVGW GAS acc.to DIN EN 331
- ☐ Antistatic

Optional:

- ☐ ATEX acc.tp 2014/34/EU



Connecting thread female/female

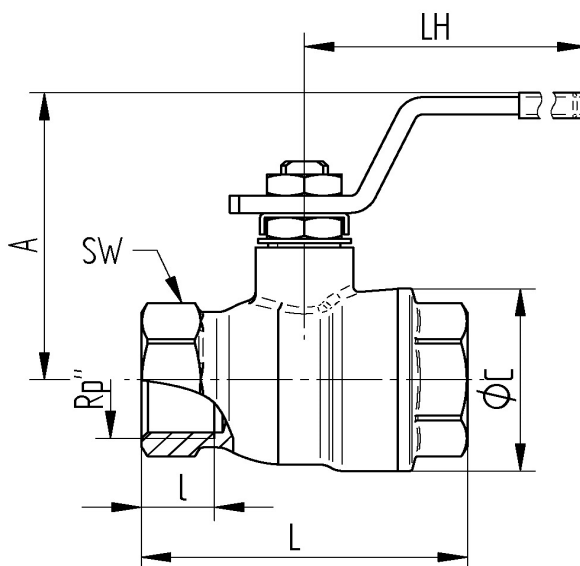

Art. Nr.	Rp	øDN	L mm	l mm	A mm	LH mm	øC mm	SW mm	PN (bar)	weight (Kg)
900-02G	1/4"	8	55	11,4	52	110	29	21,5	16/100	0,22
900-03G	3/8"	10	55	11,4	52	110	29	21,5	16/100	0,21
900-04G	1/2"	15	65	15	55	110	34	26,5	16/100	0,28
900-05G	3/4"	20	70	16,3	66	140	42,5	31,5	16/64	0,47
900-06G	1"	25	85	19,1	70	140	50,5	40,5	16/64	0,71
900-07G	1 1/4"	32	95	21,4	85	180	63	49,5	16/40	1,18
900-08G	1 1/2"	40	105	21,4	91	180	75,5	54,5	16/40	1,74
900-09G	2"	50	125	25,7	105	230	91	69,5	16/40	2,93