

Brass


TECHNICAL DATA

temperature range :	-20°C up to +150°C, drinking water 0°C bis 65°C, pressure-dependent
pressure range :	max. PN 40 bar, drinking water PN10
connecting thread :	according to DIN ISO 228/1 - long thread
body material :	CW617N, Pb2, chrome plated
ball :	CW617N, Pb2, chromed plated with flushing hole
ball seals :	PTFE TFM 1600
stem :	CW617N, Pb2, chrome plated
stem seals :	PTFE TFM 1600/ O-Ring EPDM 7008
hand lever:	steel, green plastic coated

Licensing: according to DIN-DVGW W570 for drinking water EN 13828



Connecting thread female/female

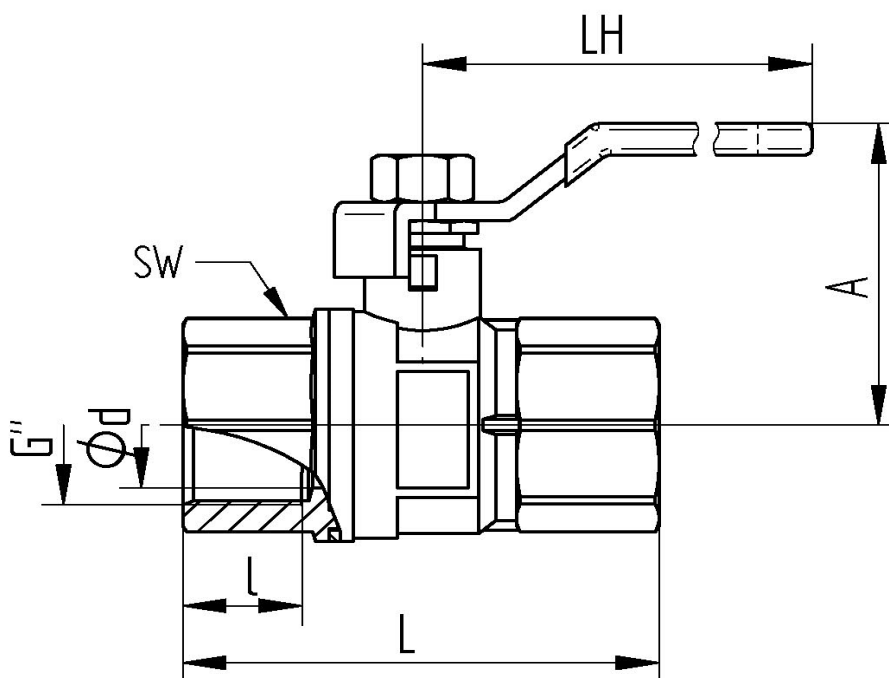

Art. Nr.	G"	DN	ød mm	L mm	l mm	A mm	LH mm	SW mm	PN	weight (g)
750-03	3/8"	10	10	50	14	38,5	73	20	10 40	125
750-04	1/2"	15	15	61	18	41,5	87	26	10 40	222
750-05	3/4"	20	19	70	18,5	45	87	32	10 32	321
750-06	1"	25	24	84	24	57	100	40	10 32	552
750-07	1 1/4"	32	32	100	25,5	67,5	130	50	10 25	942
750-08	1 1/2"	40	38	107,5	25	73	130	55	10 20	1176
750-09	2"	50	50	130	29	93,5	154	68	10 16	1980