

Brass


Technical data

Construction:	2-way ball valve
Design:	2-part design, full bore
Connection end:	Long thread acc. to DIN EN ISO 228-1
Medium temperature:	-20°C up to +150°C pressure-dependent
Nominal pressure:	Max. 40 bar temperature-dependent
Body:	Brass CW617N matt chrome-plated
Screw-in socket:	Brass CW617N matt chrome-plated
Union nut:	Brass CW617N matt chrome-plated
Ball:	Brass CW617N hard chrome plated with flushing hole
Ball seal:	PTFE TFM1600
Stem:	Brass CW617N chrome plated
Stem seal:	PTFE O-ring EPDM 7008 with stuffing box
Butterfly handle:	Aluminum green coated

DVGW-Drinking water	Approval acc.to DIN EN 13828 DVGW W570-1
ÜA-Drinking water	Approval acc.to ÖNORM EN 16421 B5014-1
Water temperature:	0°C up to +65°C pressure-dependent 90°C for max. 30 min.
Water pressure:	Max. 10 bar



Connecting thread female/union nut

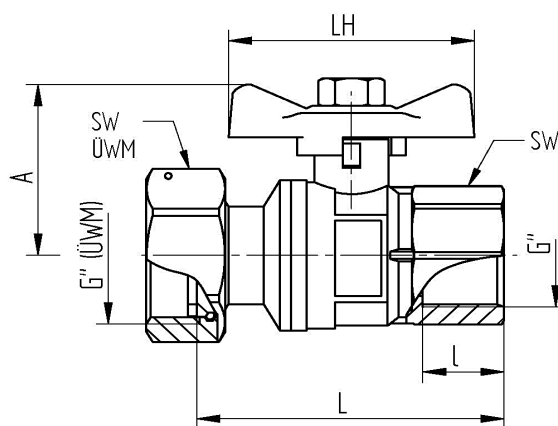

Item No.	G"	G" (ÜWM)	DN	L mm	I mm	A mm	LH mm	SW mm	SW ÜWM mm	PN bar	Weight (g)
755-44	1/2"	1/2"	15R	62	18	39	56	26	26	10 40	219
755-45	1/2"	3/4"	15	62	18	39	56	26	32	10 40	248
755-55	3/4"	3/4"	20R	68	18,5	42	56	32	32	10 32	318
755-56	3/4"	1"	20	70	18,5	42	56	32	38	10 32	344
755-66	1"	1"	25R	82	24	53	72	40	38	10 32	535