

Brass


Technical data

Construction:	2-way ball valve
Design:	2-part design, full bore
Connection end:	Long thread acc. to DIN EN ISO 228-1
Medium temperature:	-20°C up to +150°C pressure-dependent
Nominal pressure:	Max. 40 bar temperature-dependent
Body:	Brass CW617N matt chrome-plated
Screw-in socket:	Brass CW617N matt chrome-plated
Ball:	Brass CW617N hard chrome plated with flushing hole
Ball seal:	PTFE TFM1600
Stem:	Brass CW617N chrome plated
Stem seal:	PTFE O-ring EPDM 7008 with stuffing box
Hand wheel:	Grey plastic with delay closing

DVGW-Drinking water	Approval acc.to DIN EN 13828 DVGW W570-1
ÜA-Drinking water	Approval acc.to ÖNORM EN 16421 B5014-1
Water temperature:	0°C up to +65°C pressure-dependent 90°C for max. 30 min.
Water pressure:	Max. 10 bar



Connecting thread female/female

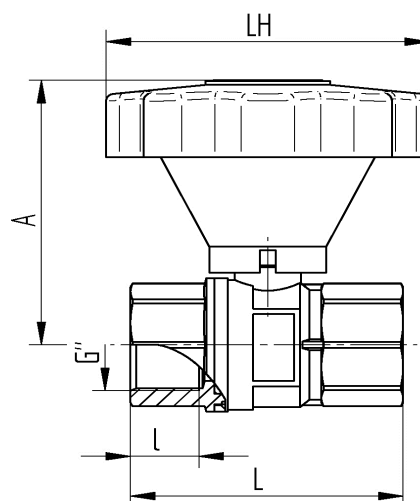

Item No.	G"	DN	ød mm	L mm	I mm	A mm	LH mm	SW mm	PN	Weight (Kg)
762-04	1/2"	15	15	61	15,5	70	83	26	10 40	0,46
762-05	3/4"	20	19	70	16,5	73	83	32	10 32	0,56
762-06	1"	25	24	84	24	81	83	40	10 32	0,77
762-07	1 1/4"	32	32	100	25,5	95	118	50	10 25	1,48
762-08	1 1/2"	40	38	107,5	25	100	118	55	10 20	1,73
762-09	2"	50	50	130	29	111	118	68	10 16	2,44