

Brass


TECHNICAL DATA:

Construction:	2-way ball valve, full bore	Medium temperature:	pressure dependent 0°C to +65°C [90°C for max. 30 minutes]
Design:	2-piece design		
Connection end:	Threaded ends acc.to DIN EN ISO 228-1		
Body:	CW617N, Pb2, heat treated, matt chrome plated	Medium nominal pressure:	temperature-dependent Drinking water PN10, other media max. PN40
Screw-in ring:	CW617N, Pb2, heat treated, matt chrome plated		
Ball:	CW617N, Pb2, chrome plated, with flushing hole	Actuation:	Handwheel with delayed closing Zinc die-cast chrome-plated with gray plastic handle
Stem:	CW617N, Pb2, chrome plated		
Ball seal:	PTFE TFM1600		
Spindle seal:	PTFE TFM1600 EPDM O-ring		

Approval: DIN DVGW DRINKING WATER
DIN EN 13828 | DVGW W570-1



Threaded ends female/female

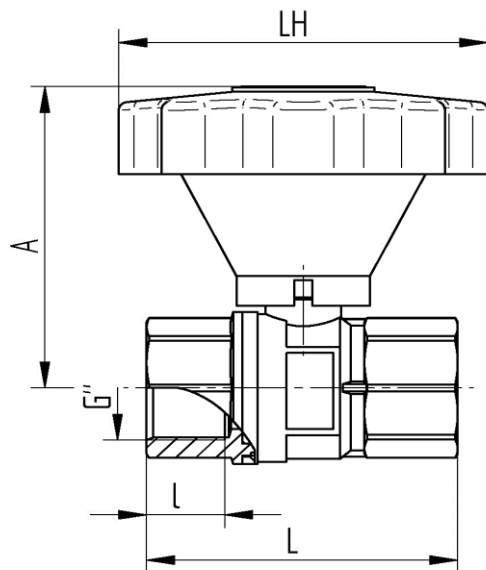

Item No.	G"	DN	ød mm	L mm	l mm	A mm	LH mm	SW mm	PN	Weight (Kg)
762-04	1/2"	15	15	61	15,5	70	83	26	10 40	0,46
762-05	3/4"	20	19	70	16,5	73	83	32	10 32	0,56
762-06	1"	25	24	84	24	81	83	40	10 32	0,77
762-07	1 1/4"	32	32	100	25,5	95	118	50	10 25	1,48
762-08	1 1/2"	40	38	107,5	25	100	118	55	10 20	1,73
762-09	2"	50	50	130	29	111	118	68	10 16	2,44