

Brass


Technical data

Construction:	2-way ball valve
Design:	2-part design, full bore
Connection end:	Long thread acc. to DIN EN ISO 228-1
Medium temperature:	-20°C up to +150°C pressure-dependent
Nominal pressure:	Max. 40 bar temperature-dependent
Body:	Brass CW617N matt chrome-plated
Screw-in socket:	Brass CW617N matt chrome-plated
Ball:	Brass CW617N hard chrome plated with flushing hole
Ball seal:	PTFE TFM1600
Stem:	Brass CW617N chrome plated
Stem seal:	PTFE O-ring EPDM 7008 with stuffing box
Handle lever:	Steel, green plastic sleeve

DVGW-Drinking water	Approval acc.to DIN EN 13828 DVGW W570-1
ÜA-Drinking water	Approval acc.to ÖNORM EN 16421 B5014-1
Water temperature:	0°C up to +65°C pressure-dependent 90°C for max. 30 min.
Water pressure:	Max. 10 bar



Connecting thread female/male

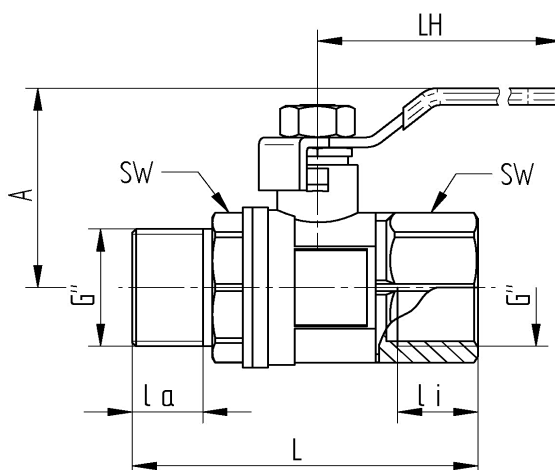

Item Nr.	G"	DN	L mm	l i mm	l a mm	A mm	LH mm	SW mm	PN	Weight (g)
7501-04	1/2"	15	68	18	16	42	87	26	10 40	225
7501-05	3/4"	20	74	19	17	45	87	32	10 32	310
7501-06	1"	25	91	24	21	58	100	40	10 32	560
7501-07	1 1/4"	32	107	26	23	68	130	50	10 25	960
7501-08	1 1/2"	40	116	25	23	73	130	55	10 20	1205
7501-09	2"	50	138	29	27	94	154	68	10 16	2030