


Construction:	2-way ball valve
Design:	2-part design, full bore
Connection end:	Presscontour M+V
Medium temperature:	-20°C up to +120°C pressure-dependent
Nominal pressure:	Max. 40 bar temperature-dependent
Pressure air:	Max. 10 bar
Body:	Brass CW510L blank
Screw-in socket:	Brass CW510L blank
Ball:	Brass CW510L hard chrome plated
	Cavity free design
Ball seal:	PTFE
Stem:	Brass CW510L blow-off proofed
Stem seal:	PTFE EPDM 70A-Oring with stuffing box
T-handle:	Plastic (Nylon) black
Inlay:	Green Red Blue

Drinking water approval in preparation

DVGW-Drinking water	Approval acc.to DIN EN 13828 DVGW W570-1
Water temperature:	0°C up to +65°C pressure-dependent 90°C for max. 30 min.
Water pressure:	Max. 10 bar



Technical data

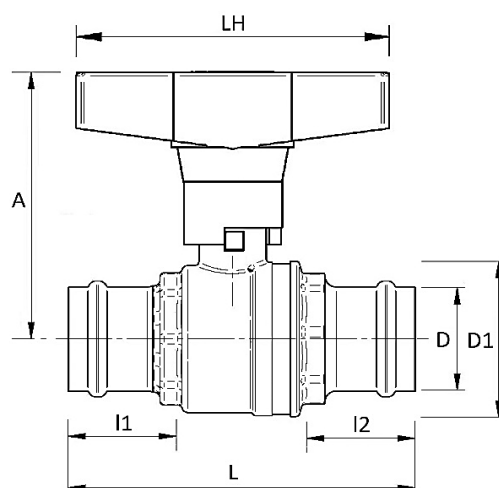

ITEM	Kontur	Viega Mannesmann		DN	D	D1	L mm	l1 mm	l2 mm	A mm	LH mm	PN bar
8080-15	15x15	✓	✓	15	15	30	93	31,5	31,5	67	95	10
8080-18	18x18	✓	✓	18	14,5	30	94	31,5	31,5	67	95	10
8080-22	22x22	✓	✓	22	19	38	104	32,5	32,5	70	95	10
8080-28	28x28	✓	✓	28	24	47	110	33	33	79	95	10
8080-35	35x35	✓	✓	35	30	58,5	123	33,5	33,5	87	120	10
8080-42 *	42x42	✓	-	42	38	70,5	158	49	49	93	120	10
8080-54 *	54x54	✓	-	54	48	86,5	179	53,5	53,5	107	120	10

Note:

* Not in stock, items available only upon request