

Brass


Technical data

Construction:	2-way ball valve
Design:	2-part design, full bore
Connection end:	Long thread acc. to DIN EN ISO 228-1
Medium temperature:	-20°C up to +180°C pressure-dependent
Nominal pressure:	Max. 40 bar temperature-dependent
Body:	Stainless steel 1.4408
Screw-in socket:	Stainless steel 1.4408
Ball:	Stainless steel 1.4408 with flushing hole
Ball seal:	PTFE TFM1600
Stem:	Stainless steel 1.4408
Stem seal:	2 folds PTFE with stuffing box
T-Handle:	Aluminum green coated

DVGW-Drinking water	Approval acc.to DIN EN 13828 DVGW W570-1
ÜA-Drinking water	Approval acc.to ÖNORM EN 16421 B5014-1
Water temperature:	0°C up to +65°C pressure-dependent 90°C for max. 30 min.
Water pressure:	Max. 10 bar



Connecting thread female/male

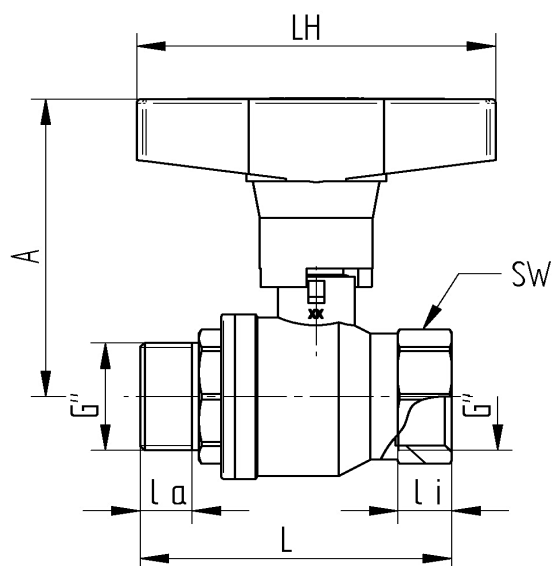

Item No. Nr.	G"	DN	L mm	la mm	li mm	A mm	LH mm	SW mm	PN bar	Weight (g)
9381-03	3/8"	10	48	9	9	61,5	80	20	40	184
9381-04	1/2"	15	61	10	10	67	80	25	40	263
9381-05	3/4"	20	69	12	12	72,5	80	31	40	365
9381-06	1"	25	81	13	13	79,5	80	38	40	530
9381-07	1 1/4"	32	91	16	16	86,5	120	48	25	879
9381-08	1 1/2"	40	102	16	18	93,5	120	54	25	1181
9381-09	2"	50	115	16	18	106,5	120	66	25	2047