

## Stainless steel

### TECHNICAL DATA

Construction:	2-way full bore ball valve
Design:	2-part design
Connection end:	According to DIN EN ISO 228-1
Body:	Stainless steel 1.4408
Screw-in socket:	Stainless steel 1.4408
Ball:	Stainless steel 1.4408 with flushing hole
Stem:	Stainless steel 1.4401 Blow-out proof
Ball seal:	PTFE TFM1600
Stem seal:	PTFE TFM1600   EPDM
Medium nominal pressure:	Temperature-dependent Max. 40 bar Max. 10 bar for drinking water
Medium temperature:	Pressure dependent -20°C up to +180°C 0°C up to +65°C for drinking water [90°C for max. 30 Minutes]
Actuation:	Handlever stainless steel, PVC sleeve green




### Approval:

- DIN DVGW DRINKING WATER
- DIN EN 13828 | DVGW W570-1 PN10



### Connecting thread female/female

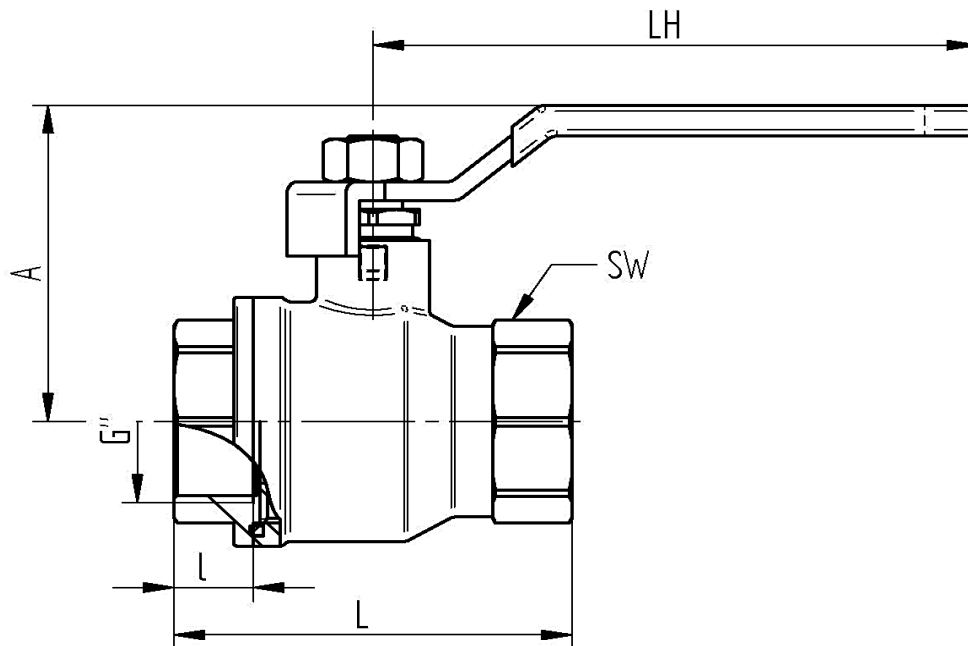

Art.Nr.	G"	DN	Lmm	l mm	A mm	LH mm	SW mm	PN bar	Weight (g)
9390-03	3/8"	12	40	9	41	94	20	40 10	150
9390-04	1/2"	15	50	10	52	94	25	40 10	207
9390-05	3/4"	20	60	12	51,5	94	31	40 10	330
9390-06	1"	25	68	13	66	115	38	40 10	472
9390-07	1 1/4"	32	80	16	68,5	130	48	25 10	910
9390-08	1 1/2"	40	94	18	74,5	130	54	25 10	1187
9390-09	2"	50	106	18	92,5	154	66	25 10	2101