


Technical Data

Design characteristic:	2 external connectors
Control voltage:	230V AC 50/60 Hz
Motor power:	6 W
Operating time:	Approx. 15 seconds for 90° at 18 Nm
Turning angle:	0°-90°
Mode of operation:	*OPEN* *CLOSE*
Operating temperature:	-25°C up to +55°C
Electrical connections:	1 connector: Voltage supply 1 connector: Position feedback signal
Limit switches:	2 switches for 90° rotation 2 switches for feedback *OPEN* *CLOSE*
Actuator connection	Acc. to DIN ISO 5211
ISO-Flange connection:	F03 F04 F05 Star 11x11
Protection class:	IP 64
Housing cover:	Aluminium alloy coated
Manual override:	Allen key



Technical Data

Design characteristic:	2 external connectors
Control voltage:	24V DC ± 10%
Motor power:	8 W
Operating time:	Approx. 10 seconds for 90° at 18 Nm
Turning angle:	0°-90°
Mode of operation:	*OPEN* *CLOSE*
Operating temperature:	-25°C up to +55°C
Electrical connections:	1 connector: Voltage supply 1 connector: Position feedback signal
Limit switches:	2 switches for 90° rotation 2 switches for feedback *OPEN* *CLOSE*
Actuator connection	Acc. to DIN ISO 5211
ISO-Flange connection:	F03 F04 F05 Star 9x9 11x11
Protection class:	IP 64
Housing cover:	Aluminium alloy coated
Manual override:	Allen key

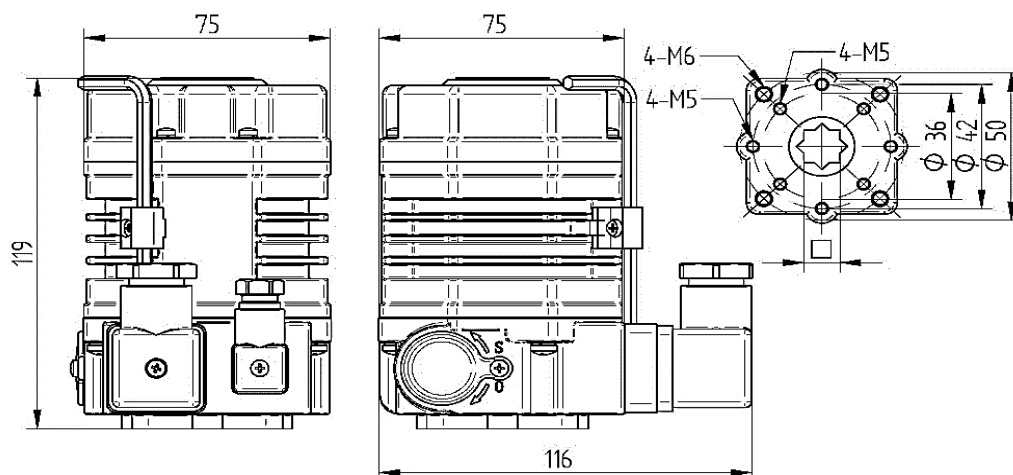

Maßangaben, sowie Abbildungen sind unverbindlich. Wir behalten uns Änderungen nach dem Stand der Technik vor.

Measurements, as well as pictures are non-binding. We reserve ourselves changes according to the state of the technology.