


Technische Daten

Design characteristic:	AE03
Control voltage:	Cable connection with 7 cores 24V AC
Motor power:	6 W
Operating time:	Approx. 15 seconds for 90° at 18 Nm
Turning angle:	0°-90°
Mode of operation:	*OPEN* *CLOSE*
Operating temperature:	-25°C up to +55°C
Electrical connections:	Screw connection G 1/2" x ISO M20
Limit switches:	2 switches for 90° rotation 2 switches for feedback *OPEN* *CLOSE*
Actuator connection	Acc. to DIN ISO 5211
ISO-Flange connection:	F03 F04 F05 Star 11x11
Protection class:	IP 67
Housing cover:	Aluminium alloy coated
Manual override:	Allen key

SIL

CSA/UL

Approval acc. to IEC61508|61518
Safety regulation for USA|Canada

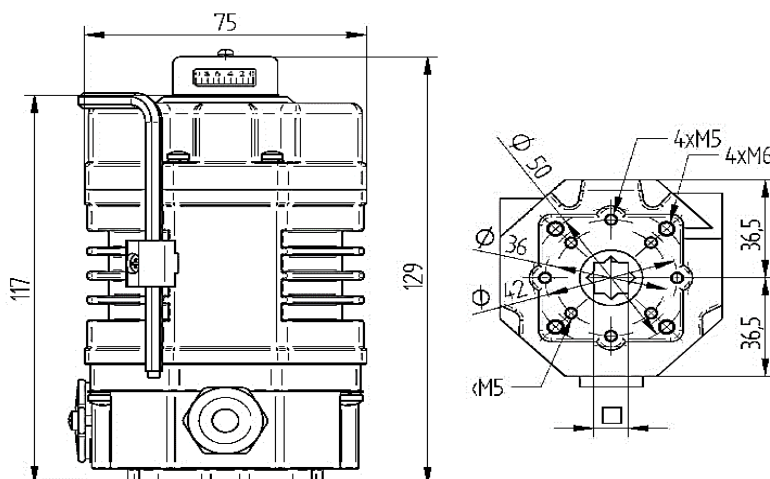

Maßangaben, sowie Abbildungen sind unverbindlich. Wir behalten uns Änderungen nach dem Stand der Technik vor.

Measurements, as well as pictures are non-binding. We reserve ourselves changes according to the state of the technology.

WESA-Armaturen GmbH | Spaninger Straße 5 | 73650 Winterbach | Telefon: +49 7181 404-0 | e-mail: info@wesa-armaturen.de | www.wesa-armaturen.de