


## TECHNICAL DATA:

Make:	Belimo Stellantriebe Vertriebs GmbH		
	SRFA-S2-5		
Control:	open-close	Parallel operation:	yes ( note the performance data)
Nominal voltage:	AC 24...240 V / DC 24...125 V	Torque motor:	min. 20 Nm
Nominal voltage range:	AC 19.2...264 V / DC 21.6...137.5 V	Torque spring return:	min. 20 Nm
Power consumption:	in operati 7 W	Manual override:	be means of hand crank and locking switch
	at rest: 3,5 W		max. 90°
	for wire si 18 VA	Angle of rotation:	max. 90°
Ambient temperature:	-30 ... +50°C	Running time motor:	≤75 s / 90°
Auxillary switch:	2 x EPU, 1 x 10% / 1 x 11...90% <input type="checkbox"/>	emergency setting position:	<20 s / 90°
Switching capacity auxillary switch:	1 mA...3 (0.5) A, AC 250 V	Position indication:	mechanical
Connection supply/control:	Cabel 1 m, 2 x 0.75 mm <sup>2</sup>	Connection flange:	F05 / square SW14
Connection auxillary switch:	Cable 1 m, 6 x 0.75 mm <sup>2</sup>	Weight approx.:	2.5 kg
Protection class:	II protective insulated	Maintenance:	maintenance-free
Degree of protection:	IP 54		



## Wiring diagrams

AC 24...240 V / DC 24...125 V, open-close

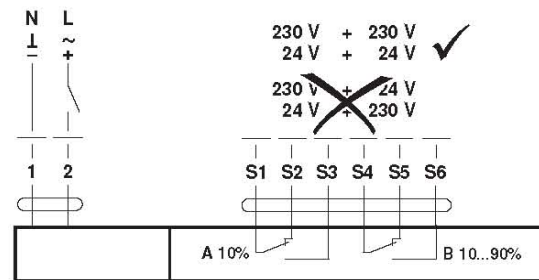

### Cable colours:

- 1 = blue
- 2 = brown
- S1 = violet
- S2 = red
- S3 = white
- S4 = orange
- S5 = pink
- S6 = grey

