


DW-DOUBLE ACTING

Torque | Pilot pressure table

PN [bar]	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	7,0	8,0
DW01	3,6	4,3	5,0	5,7	6,4	7,3	8,0	8,7	10,0	11,6
DW02	8,4	10,1	11,7	13,5	15,1	16,7	18,4	20,0	23,4	26,7
DW03	14,8	17,7	20,6	23,6	26,5	29,4	32,3	35,3	41,1	47,0
DW04	29,2	35,0	40,8	46,6	52,5	58,3	64,1	69,9	81,5	93,2
DW05	45,9	55,0	64,2	73,3	82,5	91,6	101,1	110,1	128,1	146,1
DW06	66,8	80,1	93,4	106,3	120,3	133,3	146,3	160,3	186,3	213,3
DW07	139,0	167,0	195,0	223,0	250,0	278,0	306,0	333,0	389,0	444,0
DW08	285,0	341,0	398,0	455,0	512,0	577,0	625,0	682,0	795,0	909,0
DW09	533,0	639,0	746,0	852,0	976,0	1065,0	1171,0	1277,0	1490,0	1703,0

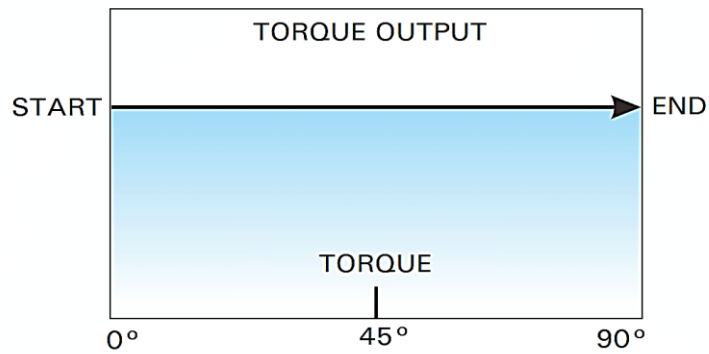

FR- SINGLE ACTING SPRING RETURN

Torque | Pilot pressure table

PN [bar]	FEDER	5,5		6,0		7,0		8,0		FEDER	
WINKEL	Stck	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°
FR01	2 x 6	10,3	6,7	12,0	8,3	15,3	11,7	18,6	15,0	11,8	8,1
FR02	2 x 6	19,0	12,1	22,0	15,0	27,8	20,9	33,7	26,8	20,3	13,4
FR03	2 x 6	37,6	22,5	43,4	28,4	55,0	40,0	66,6	51,6	41,6	26,6
FR04	2 x 6	56,8	31,5	65,9	40,6	84,2	58,9	102,0	77,2	69,4	44,1
FR05	2 x 6	85,5	51,8	98,8	65,1	125,0	92,1	152,0	118,0	94,6	60,9
FR06	2 x 6	179,0	107,0	206,0	135,0	262,0	109,0	317,0	245,0	198,0	126,0
FR07	2 x 6	355,0	225,0	411,0	282,0	525,0	396,0	638,0	509,0	399,0	269,0
FR08	2 x 6	660,0	414,0	766,0	520,0	979,0	733,0	1192,0	946,0	756,0	510,0

