

2 change over switches, with silver contact

TECHNICAL DATA


Producer switch :	ZF (Cherry)
Switch type :	D44X
Voltage :	12-250 V AC/DC
Maximum current :	10A (250V AC), 2,5A (24V DC)
Contacts :	Silver
Temperature :	-25°C up to max. +80°C
Protective kind:	IP67

Art. no.	Shaft height	
49894020	20/30	
49894023	20/30	1 Cable
49894025	20/30	2 Cable


Description

- Compact final counter box polyamide PA6 black, according to VDI/VDE 3845
- Protective kind case IP67 according to DIN EN 60529
- Cable screw connection black, M20x1,5 (for cable ø 6-12 mm)
- one drain plug
- Assembly bridges height-adjustably from PA6 with 30% of fiberglass portion and wide-adjustably
- Seals EPDM and NBR, screws high-grade steel 1.4301
- Shaft Plyamid PA6 black
- with 4 pressed-in M6 threaded sockets f. drilling pattern F05, without cable
- SIL Level SIL 1-3 (IEC61508:2010)


Switch type

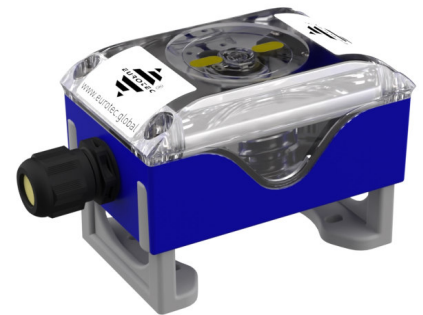

Connection (0 cable)

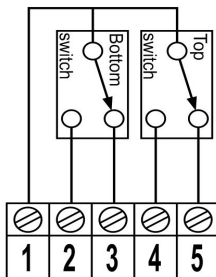

Connection (0-1 cable)

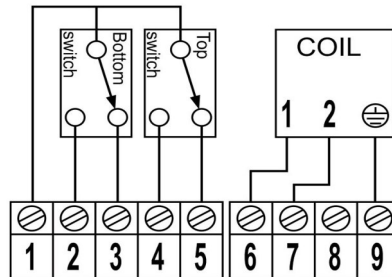

Connection (2 cable)

