


TECHNICAL DATE

Body: brass
 Seal: NBR
 Spring: stainless steel
 Filter: sintered bronze
 Filter mesh: 36 μ
 Working pressure: max. 10 bar
 Working temperature: -20 °C up to +70 °C
 cyl. threads: DIN EN ISO 228

Construction: Air regulator with Silencer
 Blocking by springpower
Application: Exhaust throttle by a control valve

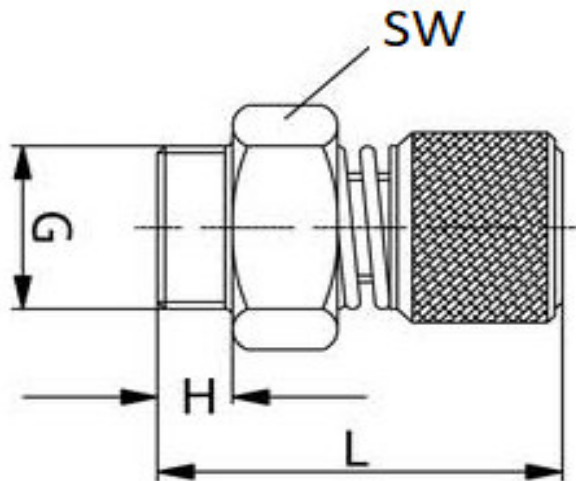

Art. Nr.	G	L	H	SW
49894061	1/8"	28	6	13
49894062	1/4"	30	8	15