


For valves up to 2" and max. torque 50 Nm.

Technical data

Housing:	GF Nylon PA6.6
Cover:	Lexan Polycarbonat
Limit switch:	2 pieces make Crouzet
Circuit board Contacts:	GF Nylon Silver, Nickel
Gasket:	NBR75
Angle of rotation:	90°
Supply voltage:	max. 250V AC / 24V DC
Switching capacity:	max. 5A
Switching function:	1 NO Contact 1 NC Contact
Protection class:	IP 65 according to EN 60529
Cable gland:	1x PG16
Drive connection:	According to DIN EN ISO 5211
Operating temperature:	-20°C up to max. +70°C
Hand lever:	Stainless steel with PVC sleeve grey



OPEN

Ph	4
NO	5
NC	6



CLOSED

Ph	3
NO	2
NC	1

Ph = phase

NO = normal offen

NC = normal geschlossen

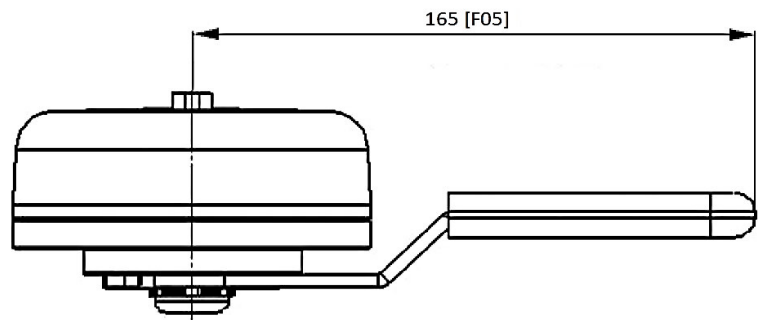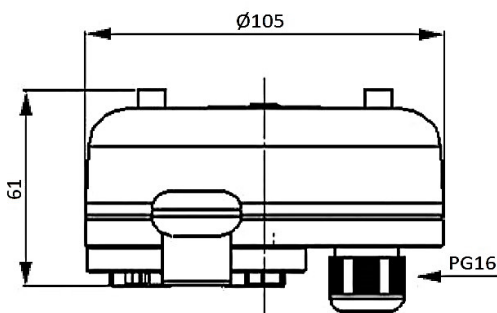

DIN EN ISO 5211 - F03 9x9
DIN EN ISO 5211 - F05 14x14

