

Stainless steel

TECHNICAL DATA BALL VALVE

Body:	Stainless steel 1.4404
Body caps:	Stainless steel 1.4404
Connection:	Threaded ends acc. to DIN EN ISO 228-1
Ball:	Stainless steel 1.4404
Ball seat:	POM
Stem:	Stainless steel 1.4404
Stem packing:	NBR POM
Medium temperature:	-30°C up to +100°C pressure dependent
Pressure rating:	Max. 500 bar temperature dependent

Approval: ☐ ATEX acc.to 2014/34/EU
☐ EAC acc.to TR CU 010/2011

TECHNICAL DATA ACTUATOR

Functionality :	DW double acting
Design feature :	control shaft-bevel principle
Piston channel :	self centering in body
Operating temperature :	- 20° C up to + 80 ° C
Angle of rotation :	90 ° from + 5° up to - 5° adjustable
Torque max. :	see chart (Nm) at 6 bars compressed air
Control medium :	filtered and oiled blast according Pneurop/ISO categorie 4

Mounting path :

Actuator/Armatur : 4 or 8 female thread in the body according to DIN ISO 5211

Actuator/Control valve : according to Namur respectively VDI/VDE 3845


Actuator/Signaling device : according to VDI/VDE 3845 (Namur)

License: ATEX 2014/34/EU

Accessories actuator

Position announcement : optically, in the scope of supply mounts

Connecting thread female/female

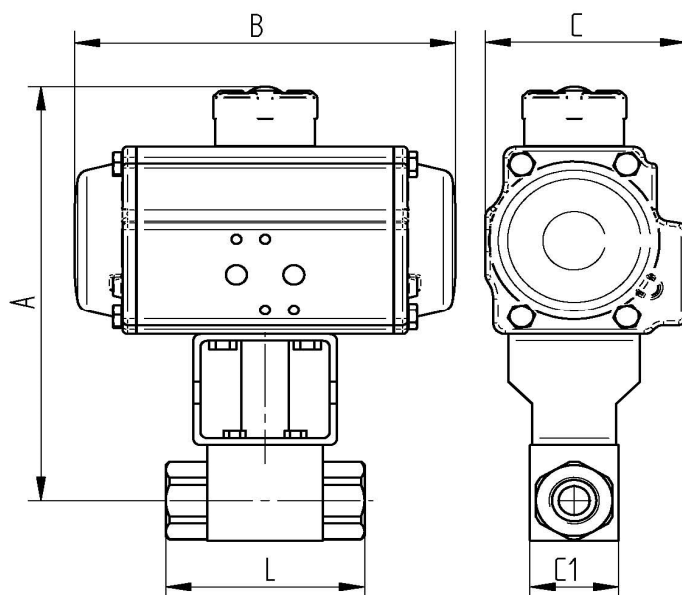

Art. Nr.	G"	DN	L mm	C1 mm	A mm	B mm	C mm	Nm
DW03 9769-02	1/4"	6	71	30	183	162	84	36
DW03 9769-03	3/8"	10	73	35	187	162	84	36
DW03 9769-04	1/2"	13	83	37	187	162	84	36
DW04 9769-05	3/4"	20	95	49	213	208	96	70
DW05 9769-06	1"	25	112	55	230	246	108	110
DW05 9769-07	1 1/4"	32	115	85	241	246	108	110
DW06 9769-08	1 1/2"	40	131	105	260	266	123	160
DW07 9769-09	2"	50	140	117	309	347	151	333