


Brass

Technical data

Construction:	2-way antifreeze valve	Body:	Brass CW617N bright
Design:	2-part design, full bore	Screw-in socket:	Brass CW617N bright
Connection end:	Male thread acc. to DIN EN ISO 228-1	Seal:	EPDM
Ambient temperature:	-30°C up to +60°C pressure-dependent	O-Ring:	EPDM
Operating temperature:	0°C up to +65°C	Spring:	Stainless steel AISI 304
Opening temperature:	+3°C		
Closing temperature:	+4°C		
Inlet pressure (static):	Max. 10 bar temperature-dependent		

The frost protection valve enables the circuit fluid to be drained when the temperature reaches an average of 3°C.

Connection end male|male

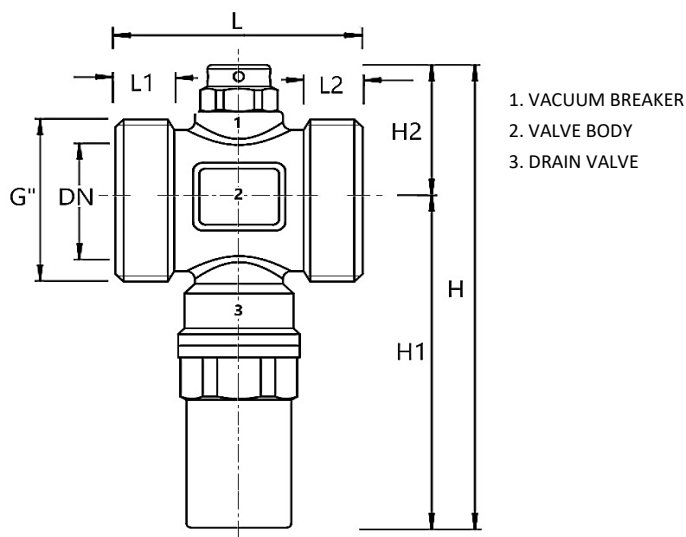

Item No.	G"	DN	L1 mm	L2 mm	L mm	H1 mm	H2 mm	H mm	PN bar	Weight [g]	KVS-Value [m³/h]
20400010-06	1"	25	10	10	52	82,5	33	115,50	10	347	55
20400010-07	1 1/4"	28,5	14	14	59	84,5	35	119,50	10	374	70
20400010-08	1 1/2"	32	15,5	15,5	62	86	36,5	122,50	10	408	88