

Messing


TECHNICAL DATA BALL VALVE:

Item No. 837:	T-Port
Item No. 838:	L-Port
Construction:	3-way ball valve
Design:	4-part design full bore
Connection end:	Thread acc. to DIN EN 10226-1
Actuator connection:	DIN EN ISO 5211 [direct installation]
Medium temperature:	-20°C up to +160°C pressure-dependent
Nominal pressure:	Max. 30 bar temperature-dependent
Body:	Brass CW617N nickel-plated
Screw-in socket:	Brass CW617N nickel-plated
Ball:	Brass CW617N hard chrome plated
	Ball position by spindle marking.
Stem:	Brass CW617N nickel-plated
Ball seal:	PTFE sealing on all sides
Stem seal:	PTFE 2 fold FKM

TECHNICAL DATA ACTUATOR

Item No.	EL01
Control voltage :	230V AC 50/60 Hz
Item No.	EL02
Control voltage :	24V DC
Torque max :	15 Nm
Power consumption :	4 W
Operating time :	Approx. 60 Sec. for 90° by 15 Nm
Angle of rotation :	0° - 90°
Medium temperature:	0°C up to + 50°C
Duty cycle :	60% ED
Actuator connection:	Acc.to DIN EN ISO 5211 [direct assembly]
ISO-Flange:	F03 F05 square 9x9
Electrical connection :	Kabel 3-adrig
Protection class :	IP42
Housing cover:	Polycarbonate dark grey
Manual override:	Handle lever
Weight:	max. 0,86 Kg

Anschlussgewinde innen / innen

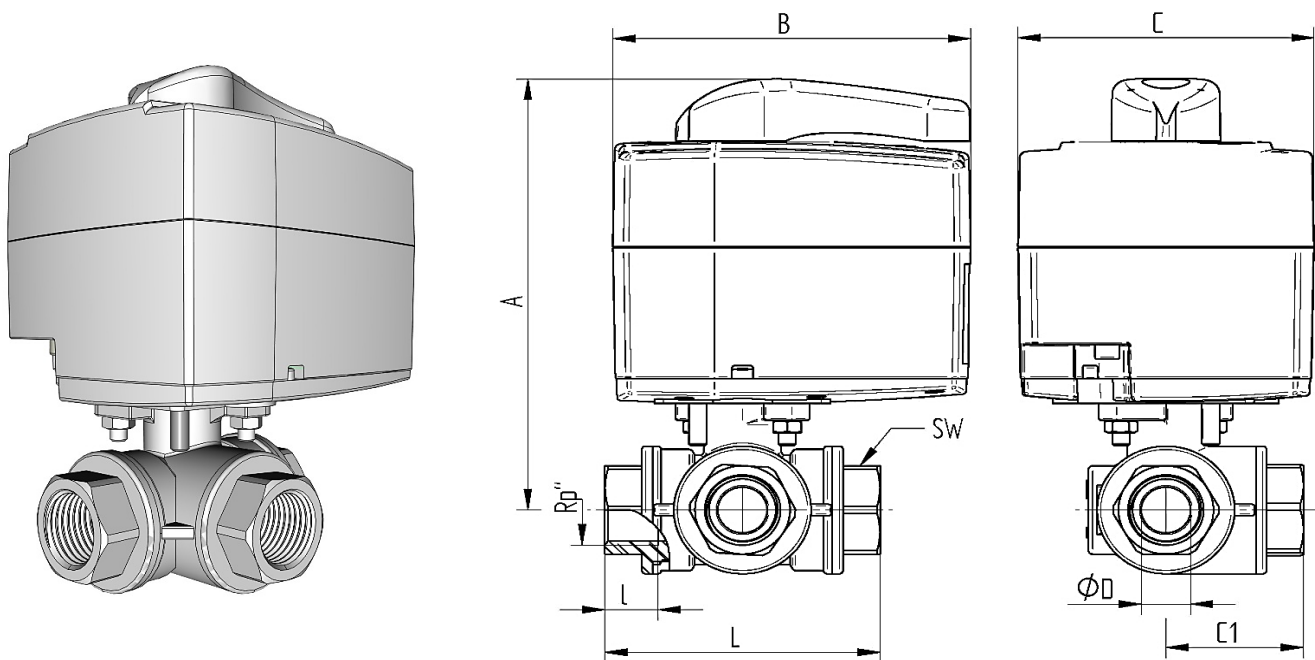

Item No. 230V 50 Hz.	Item No. 24V DC	Rp"	DN	øD mm	A mm	B mm	C mm	L mm	L1 mm	C1 mm	SW mm
EL010837_0838-03	EL020837_0838-03	3/8"	10	11	129	101	84	67	15	34	22
EL010837_0838-04	EL020837_0838-04	1/2"	15	15	132	101	84	78	18	39	27