


Brass

TECHNICAL DATA

Construction:	2-way ball valve	Body:	Brass CW617N nickel-plated
Design:	2-part design full bore	Screw-in socket:	Brass CW617N nickel-plated
Connection end:	Long thread acc. to DIN EN 10226-1	Ball:	Brass CW617N hard chrome plated
Actuator connection:	DIN EN ISO 5211 [direct installation]	Ball seal:	PTFE FKM
Medium temperature:	-20°C up to +120°C pressure-dependent	Stem:	Brass CW614N nickel-plated
Nominal pressure:	Max. 40 bar temperature-dependent	Stem seal:	PTFE FKM

Connecting thread female/female

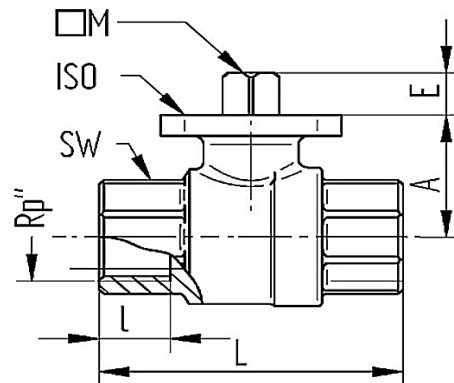

Item No.	Rp"	DN	L mm	I mm	A mm	SW mm	E mm	M mm	øISO	PN bar	Weight (g)
768-04	1/2"	15	62	15	29	25	9	9	F03	40	242
768-05	3/4"	20	72	16	31	31	9	9	F03	40	332
768-06	1"	25	82	17	36	38	9	9	F03	40	529
768-07	1 1/4"	32	94	19	44	48	9	9	F03 F05	25	827
768-08	1 1/2"	40	106	21	52	55	9	9	F03 F05	25	1250
768-09	2"	50	120	22	58	68	9	9	F03 F05	25	1838