

Stainless steel


Technische Daten

Body:	Stainless steel 1.4408
Screw-in socket:	Stainless steel 1.4408
Connection end:	female thread according to DIN EN 10226-1
Body sealing:	RPTFE 15% glass fiber reinforced
Ball:	Stainless steel 1.4401
Ball seal:	high strength DELRIN
Spindle:	Stainless steel 1.4401
Stem seal:	RPTFE 15% glass fiber reinforced
	FKM O-Ring
Actuator connection:	DIN EN ISO 5211
Operating temperature :	- 25°C up to max. + 80°C, pressure dependent
Operating pressure :	max. PN 200 bar temperature dependent
Hand lever:	Stainless steel 1.4301 lockable
	blue plastic sleeve

Approval: ATEX acc.to 2014/34/EU



Connecting thread female / female

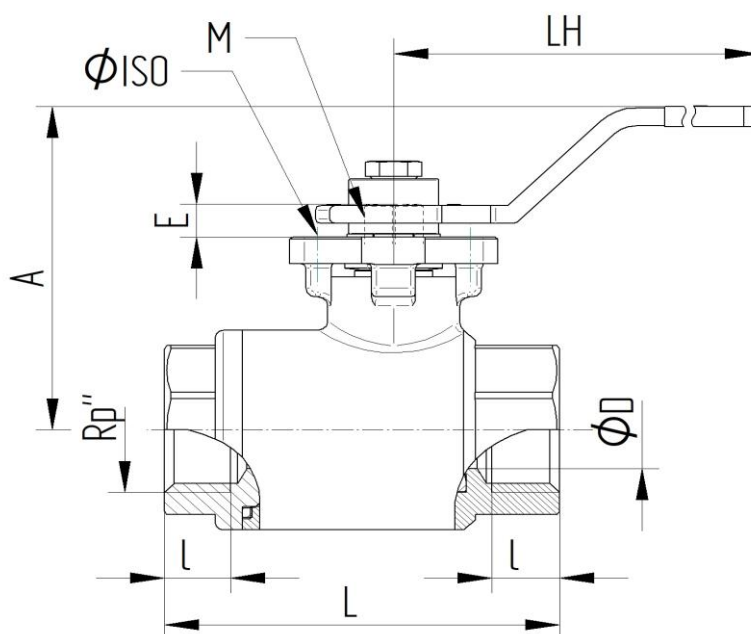

Item No.	Rp"	DN	øD	L mm	l mm	A mm	LH mm	M mm	øISO	SW	E mm	Nm	Weight (kg)
9765-02	1/4"	10	9,7	75	12	70	115	9	F03 F04	26	8,5	8	0,80
9765-03	3/8"	12	9,7	75	12	70	115	9	F03 F04	26	8,5	8	0,78
9765-04	1/2"	15	12,7	75	14	70	117	9	F03 F04	30	8,5	8	0,76
9765-05	3/4"	20	17,5	81	14	72	117	9	F03 F04	38	9,0	13	1,00
9765-06	1"	25	22,1	91	17	83	134	11	F04 F05	46	11	15	1,56
9765-07	1 1/4"	32	29	110	18	90	134	11	F04 F05	59	12	25	2,44
9765-08	1 1/2"	40	35	121	20	114	203	14	F05 F07	66	13	30	3,62
9765-09	2"	50	35	145	24	114	203	14	F05 F07	75	13	45	4,76