


### BRASS

available from approx. 06.2026

#### Technikcal Data

Operating temperature:	-20°C to +150°C depending on pressure
Water temperature:	0°C to +65°C depending on pressure 90°C for max. 30 min.
Operating pressure:	Max. 32 bar depending on temperature
Water pressure:	Max. 10 bar
Connection:	according to DIN EN ISO 228-1
Housing material:	CW510L, nickel-plated
Cap, chain:	CW510L, chrome-plated
Ball:	CW510L, chrome-plated
Spindle:	CW510L
Ball seat seals:	PTFE TFM1600
Spindle seal:	PTFE O-ring EPDM 7008 with stuffing box
Wedge seal:	EPDM 7008
Hand lever:	Aluminum, green coated
Cap:	3/4"
<b>DVGW drinking water</b>	Approved according to DIN EN 13828   DVGW W570-1
<b>ÜA drinking water</b>	Approved according to ÖNORM EN 16421 B5014-1

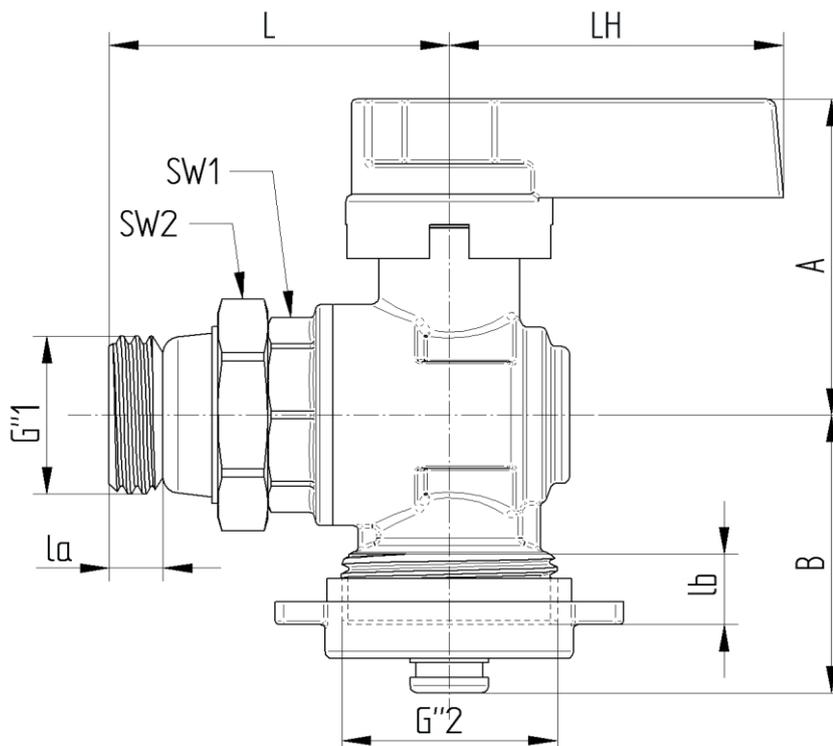

Item No.	G''1	G''2	L mm	la mm	lb mm	A mm	LH mm	SW1	SW1	PN bar	Weight (g)
1545-45	1/2"	3/4"	41	6	9	41,5	40	24	27	32	252