BALL VALVE

651-xx R / B

Brass


TECHNICAL DATA

temperature range:	- 20°C up to max. + 120°C, pressure-dependent
pressure range :	max. PN 40 bar, depending on nominal size and temperature
compressed air:	max. 10 bar
connecting thread:	according to DIN EN ISO 228-1
body material:	Brass CW617N nickel plated
threaded ends:	Brass CW617N nickel plated
ball:	Brass CW614N hard chromed
ball seals:	PTFE
stem:	Brass CW6174 nickel plated
stem seals:	PTFE , O-Ring FKM with packing gland
thermometer-handle:	nylon black, levercoating red or blue
Error limit:	Class 2 [± 4°C] acc. to DIN EN 13190


651-xxR = red
651-xxB = blue



Connecting thread female / male

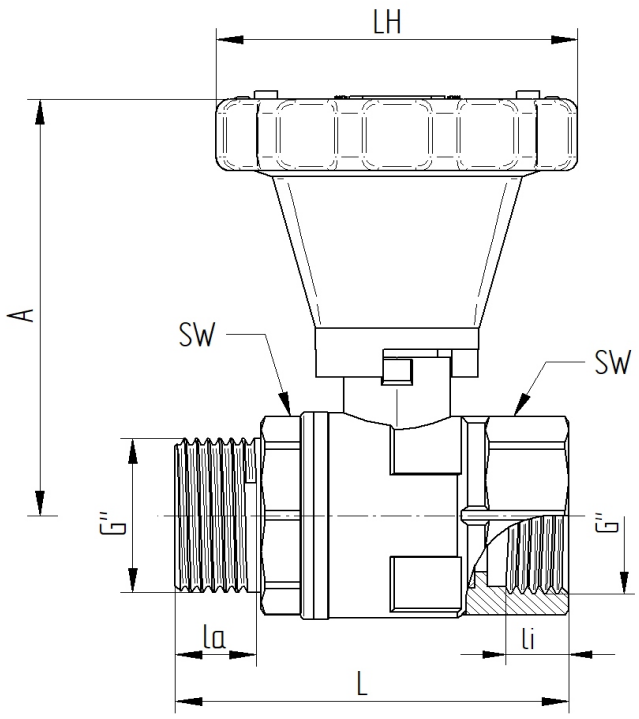

651-07 / -08 / -09

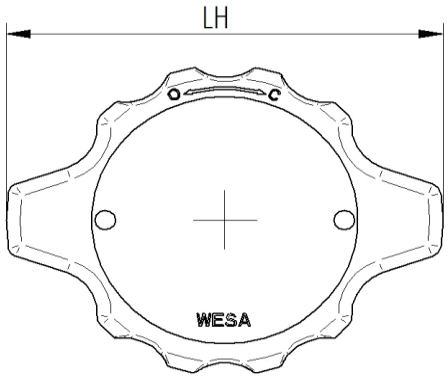

Art.Nr.	G"	øD	L mm	li mm	la mm	A mm	LH mm	SW mm	PN bar	weight (g)
651-05 R/B	3/4"	19	60	12,5	13	81	73	32	40	303
651-06 R/B	1"	24	78	16	17	91	73	40	32	534
651-07 R/B	$1^1/_4$"	32	86,5	14	16,5	101	95	48	25	780
651-08 R/B	$1^1/_2$"	38	95	14,5	17	105	95	54	20	971
651-09 R/B	2"	49,5	115	19,5	17,5	117	95	68	20	1661

09-2026

Measurements, as well as pictures are non-binding. We reserve ourselves changes according to the state of the technology
WESA-Armaturen GmbH * 73650 Winterbach *Spanninger Straße 5 * Telefon: +49 (0) 7181 404-0 · Telefax: +49 (0) 7181 404-33
www.wesa-armaturen.de e-mail : info@wesa-armaturen.de