


DW-Doppeltwirkend

Drehmoment | Steuerdruck Tabelle

PN [bar]	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	7,0	8,0
DW01	3,6	4,3	5,0	5,7	6,4	7,3	8,0	8,7	10,0	11,6
DW02	8,4	10,1	11,7	13,5	15,1	16,7	18,4	20,0	23,4	26,7
DW03	14,8	17,7	20,6	23,6	26,5	29,4	32,3	35,3	41,1	47,0
DW04	29,2	35,0	40,8	46,6	52,5	58,3	64,1	69,9	81,5	93,2
DW05	45,9	55,0	64,2	73,3	82,5	91,6	101,1	110,1	128,1	146,1
DW06	66,8	80,1	93,4	106,3	120,3	133,3	146,3	160,3	186,3	213,3
DW07	139,0	167,0	195,0	223,0	250,0	278,0	306,0	333,0	389,0	444,0
DW08	285,0	341,0	398,0	455,0	512,0	577,0	625,0	682,0	795,0	909,0
DW09	533,0	639,0	746,0	852,0	976,0	1065,0	1171,0	1277,0	1490,0	1703,0

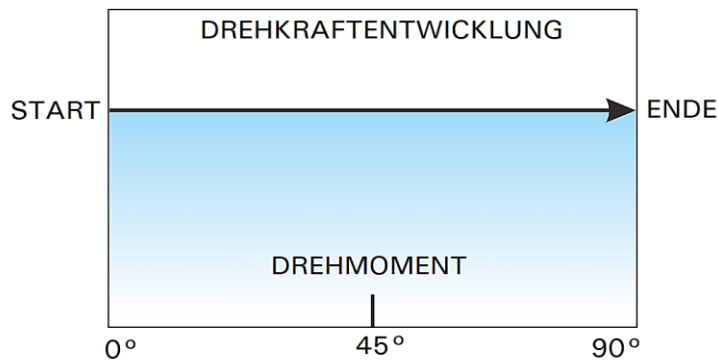

FR-Einfachwirkend federrückstellend

Drehmoment | Steuerdruck Tabelle

PN [bar]	FEDER	5,5		6,0		7,0		8,0		FEDER	
WINKEL	Stck	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°
FR01	2 x 6	10,3	6,7	12,0	8,3	15,3	11,7	18,6	15,0	11,8	8,1
FR02	2 x 6	19,0	12,1	22,0	15,0	27,8	20,9	33,7	26,8	20,3	13,4
FR03	2 x 6	37,6	22,5	43,4	28,4	55,0	40,0	66,6	51,6	41,6	26,6
FR04	2 x 6	56,8	31,5	65,9	40,6	84,2	58,9	102,0	77,2	69,4	44,1
FR05	2 x 6	85,5	51,8	98,8	65,1	125,0	92,1	152,0	118,0	94,6	60,9
FR06	2 x 6	179,0	107,0	206,0	135,0	262,0	109,0	317,0	245,0	198,0	126,0
FR07	2 x 6	355,0	225,0	411,0	282,0	525,0	396,0	638,0	509,0	399,0	269,0
FR08	2 x 6	660,0	414,0	766,0	520,0	979,0	733,0	1192,0	946,0	756,0	510,0

